
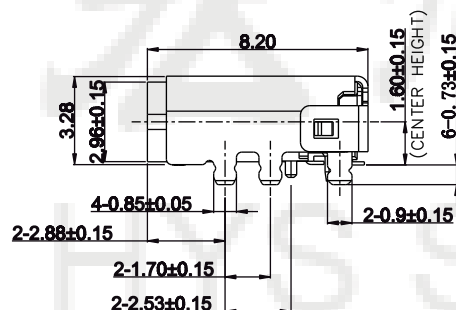
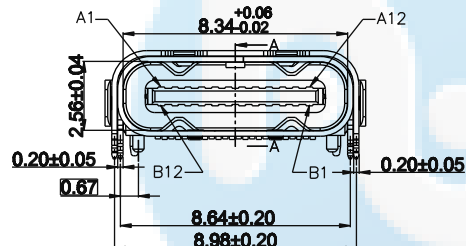
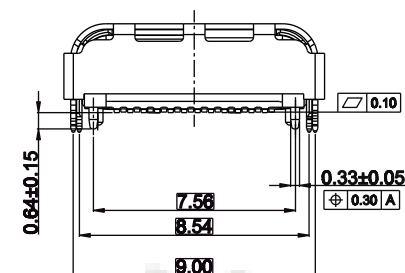
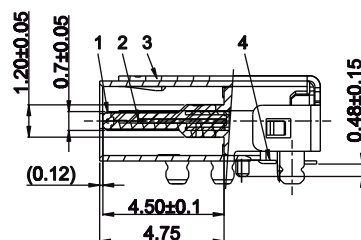


ROHS
Compatible

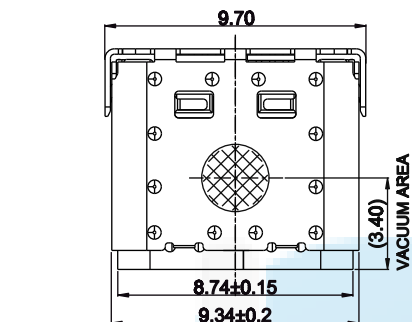


NOTE/注释:

1. SPECIFICATION/规格:

- 1.1 Rated current (额定电流): 7.0 A For Vbus pin
1.25A For Vconn pin
0.25A For Other pin
- 1.2 Voltage rating (额定电压): 20V AC
- 1.3 Contact Resistance (接触阻抗): 40 m Ω Max.
- 1.4 Insulation Resistance (绝缘阻抗): 100MΩ Min.
- 1.5 Withstanding voltage (耐电压): 100 VAC/minute
- 1.6 Mating force (插入力): 5~20N.
- 1.7 Unmating force (拔出力): 8~20N.
- 1.8 Durability Cycle (寿命循环): 10,000 cycle
- 1.9 Operating temperature (工作温度): -40°~+85°

PIN ASSIGNMENT:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

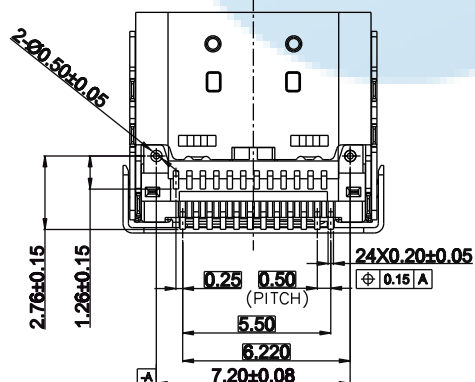



U5 192- 24P x 8.20L XX
名称 流水号 PIN位 N;母座 L;长度 端子电镀规格:
01=镀金1u"
03=镀金3u"
05=镀金5u"
15=镀金15u"
30=镀金30u"

DESIGN	Li Jinwei	SCALL			DRAWG NO. U5192-24PN8.20LXX
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		
				TOLERANCE	TITLE:
				X.X ±0.30 X.°±2°	24P板上六脚插板有后盖双壳双贴SMTCH=1.60 8.20L
				.XX ±0.20 .X°±1°	
				.XXX ±0.10 .XX°±0.5°	



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>

ROHS
Compatible

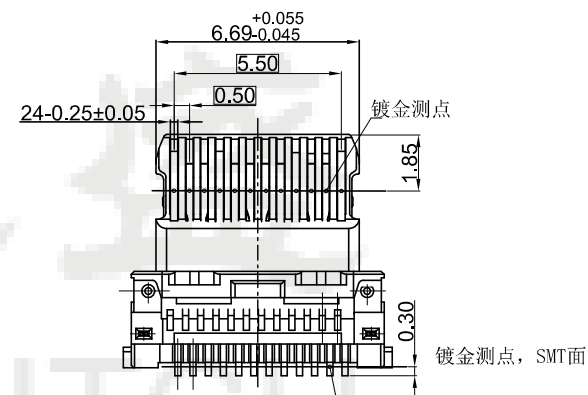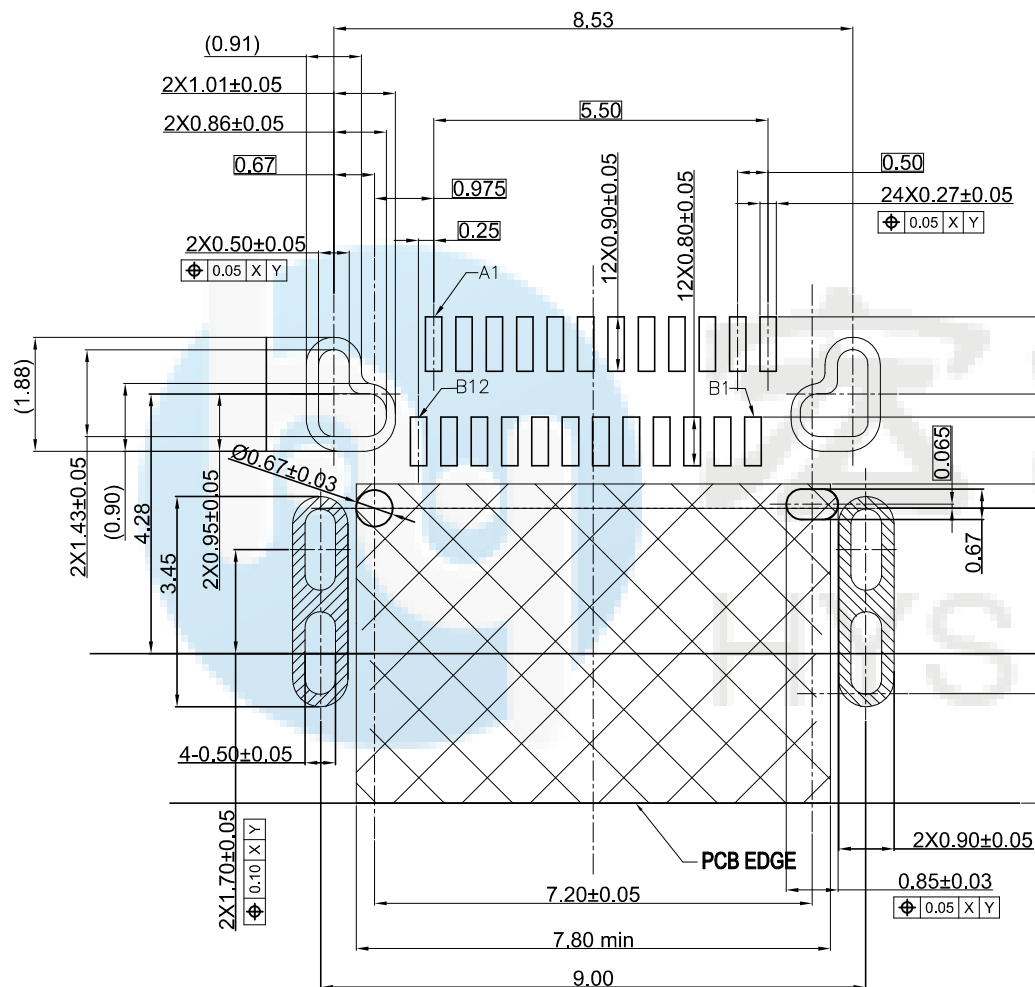





4	TERMINAL	24	COPPER ALLOY XYK-40(C18140)	MATING SIDE:SEE PART NO; SOLDER TAIL:Gold FLASH, 50u" NICKEL OVERALL.	T=0.12
3	SHELL	2	SUS 304	30U" NICKEL PLATING	T=0.20
2	MID PLATE	1	SUS301	30U" NICKEL PLATING	T=0.15
1	MAIN HOUSING	1	HIGH TEMPERATURE	PA9T BLACK	UL94V-0
ITEM	DESCRIPTION	QTY	MATERIAL	FINISH	REMARK
BILL OF MATERIAL					

DESIGN	Li Jinwei	SCALE		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm		U5192-24PN8.20LXX
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		24P板上六脚插板有后盖双壳双贴SMTCH=1.60 8.20L



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>

ROHS
Compatible

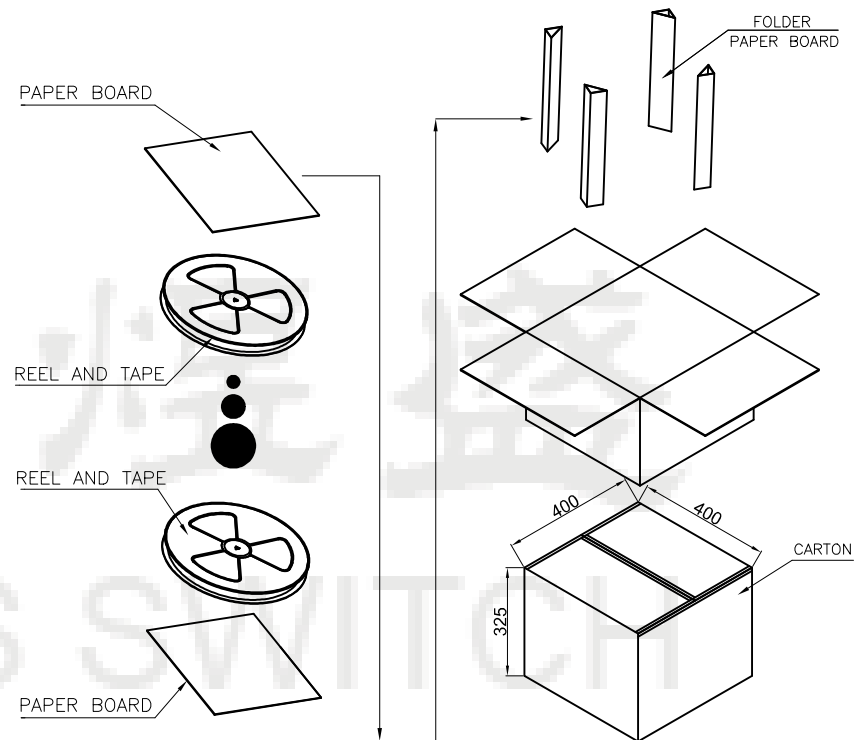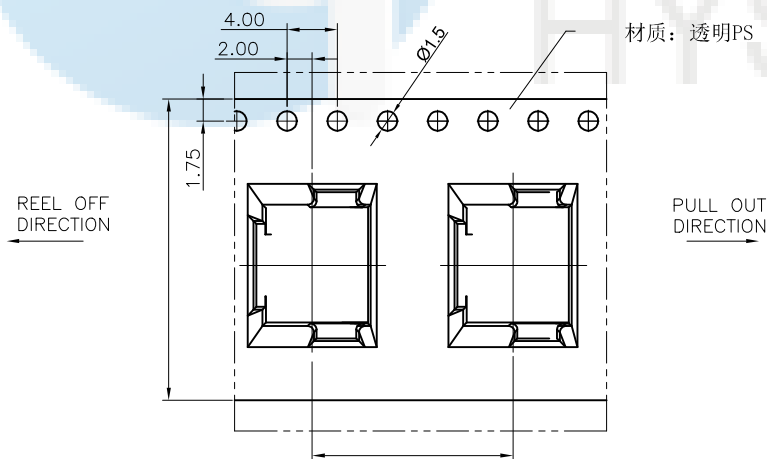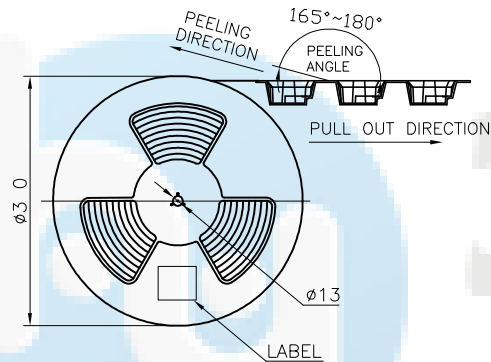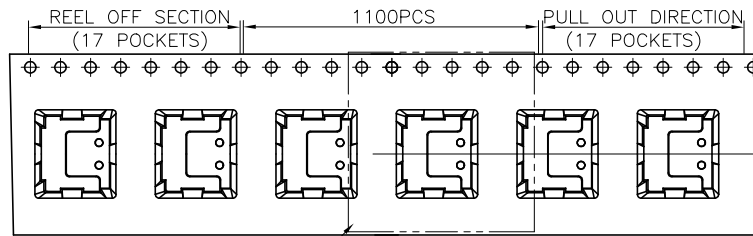

CONNECTOR (PCS)	REEL	CARTON
	1100	11000

DESIGN	Li Jinwei	SCALE		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 X.°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	U5192-24PN8.20LXX
DRAWING	Wu Qifa	UNIT	mm		TITLE:	24P板上六脚插板有后盖双壳双贴SMTCH=1.60 8.20L
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297			
APPROVAL	Liu Xiaohong	DATE	2020-06-10			



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>