

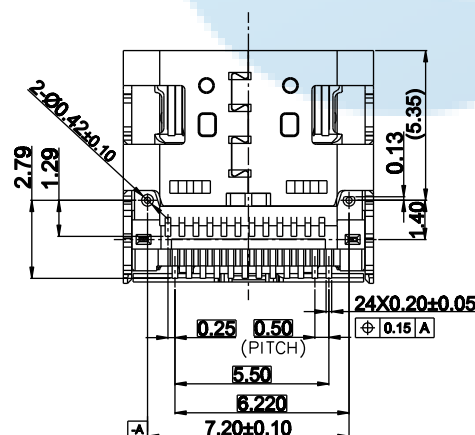
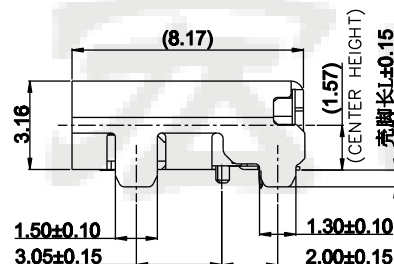
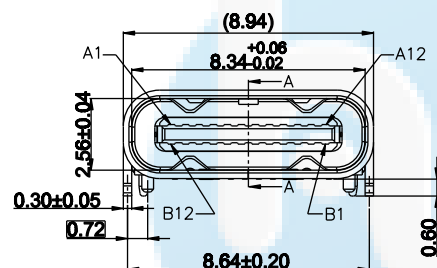
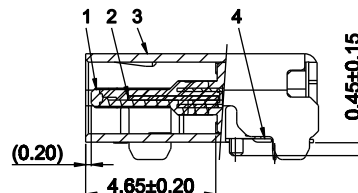


ROHS
Compatible



备注: 脚长1.2与1.6, 1.4的壳脚外形有收腰; 脚长0.6与0.9的壳脚外形无收腰。

NOTE/注释:

1. SPECIFICATION/规格:

1.1 Rated current (额定电流): 7 A For Vbus pin, 10A MAX

1.25A For Vconn pin

0.25A For Other pin

1.2 Voltage rating (额定电压): 5V AC/DC, 48V MAX

1.3 Contact Resistance (接触阻抗): 40 mΩ Max.

1.4 Insulation Resistance (绝缘阻抗): 100MΩ Min.

1.5 Withstanding voltage (耐电压): 100 VAC/minute


1.6 Mating force (插入力): 5~20N.

1.7 Unmating force (拔出力): 8~20N.

1.8 Durability Cycle(寿命循环): 10,000 cycle

1.9 Operating temperature (工作温度): -40°~+85°

U5	179-	24P	x	x	XXJ	8.17L	XX
名称	流水号	PIN位	N;母座	T;带弹	J;脚长	L;长度	端子电镀规格
					0.6		01=镀金1u"
					0.9		03=镀金3u"
					1.2		05=镀金5u"
					1.6		15=镀金15u"
					1.4		30=镀金30u"

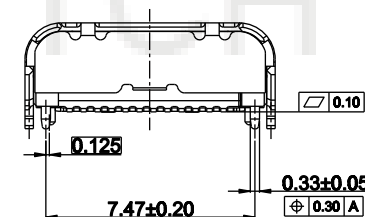

PIN ASSIGNMENT:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	X.X ±0.30	X.° ±2°
.XX ±0.20	.X° ±1°	
.XXX ±0.10	.XX° ±0.5°	

DRAWG NO.

U5179-24PNTXXJ8.17LXX

TITLE:

24P 板上型四脚插板SMT 带柱带弹 8.17L








东莞市宏煜盛实业有限公司

Dongguan hongyusheng Industry Co., Ltd

TEL: 0769-81230179 <https://www.hystypec.com>

ROHS
Compatible

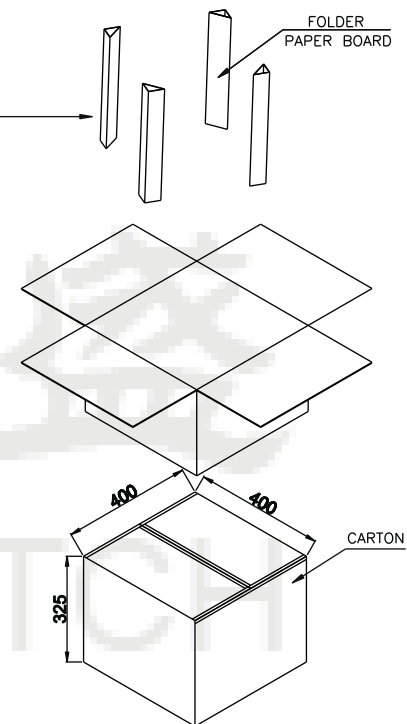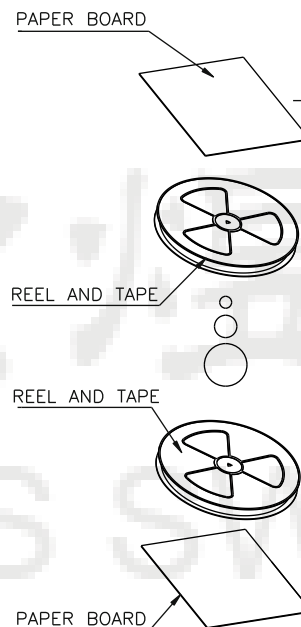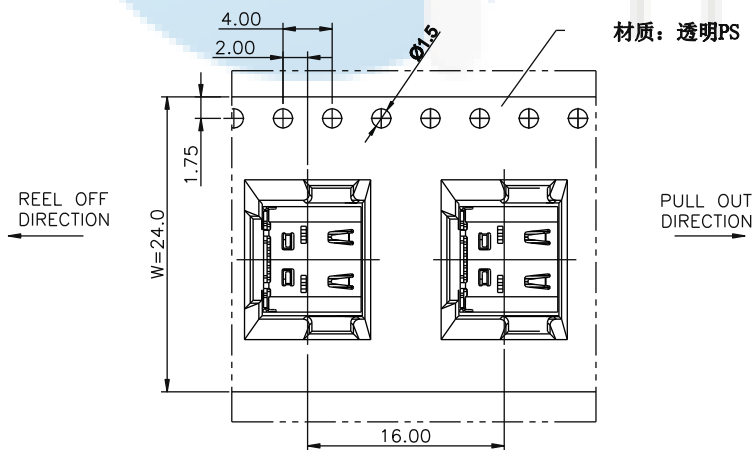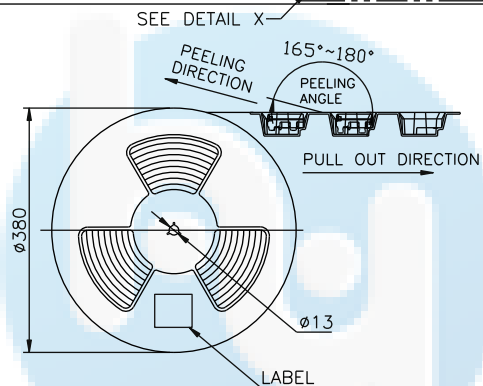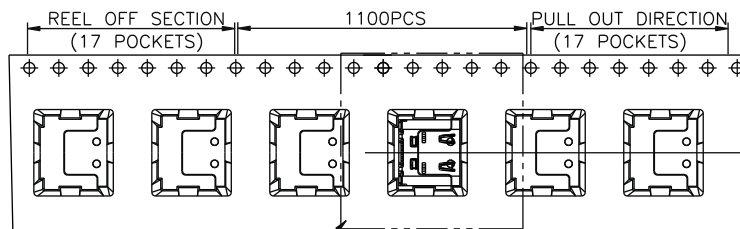

	REEL	CARTON
CONNECTOR (PCS)	1100	11000

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm		U5179-24PNTXXJ8.17LXX
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		24P 板上型四脚插板SMT 带柱带弹 8.17L



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>