



ROHS
Compatible

机壳面板



前后组装方式

此处点胶



Note:

1.Material:

1.1 Housing: PA9T

1.2 Contact: C7025, $t=0.12\text{mm}$ 1u" middleclip SUS $t=0.15\text{mm}$
焊接区g/f middleclip SUS $t=0.15\text{mm}$

1.3 Shell: Zinc Alloy 表面镀镍30-50U" MIN

2.ELECTRICAL:

2-1:CURRENT RATING:

VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 3A;

2-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS

2-3:DIELECTRIC WITHSTANDING VOLTAGE:
30V AC MIN;

3:MECHANICAL CHARACTERISTICS:

3-1:MATING FORCE:5~20N

3-2:UNMATING FORCE:8~20N(INITIAL),
6~20N(AFTER 10000 CYCLES)

3-3:FREQUENCY: 200±50 CYCLES /HOUR,10000 CYCLES







3-4:OPERATING TEMPERATURE ;-40°~80°.

4: WATERPROOF: IP-X7.

U5 279- 16P x 7.5L x
名称 流水号 PIN位 N;母座 L;长度 F;防水

USB TYPE-C PIN ASSIGNMENTS

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

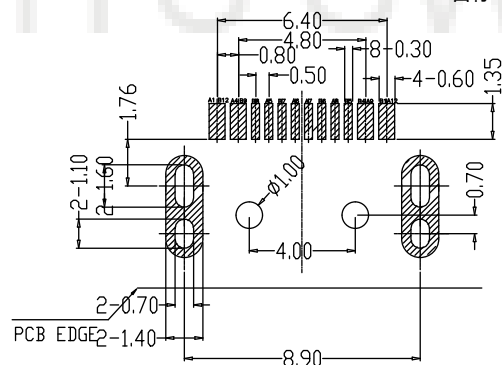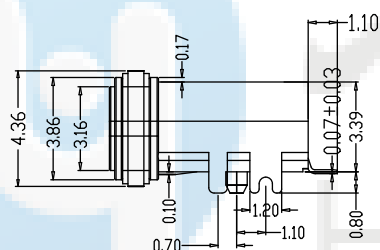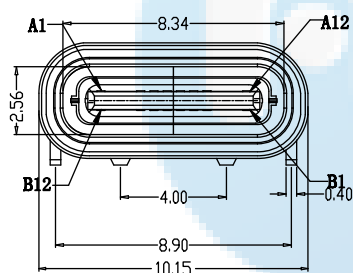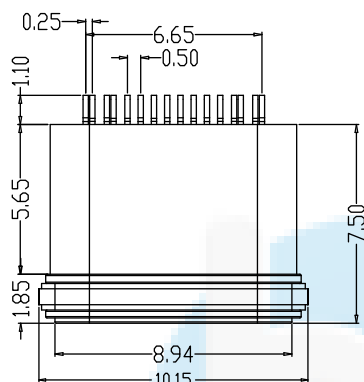


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

DESIGN	Li Jinwei	SCALE			DRAWG NO. U5279-16PN7.5LF
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		
				TOLERANCE	TITLE:
				X.X ±0.30 X.°±2°	防水16P 板上四脚插板SMT 7.5L IPX7
				.XX ±0.20 .X°±1°	
				.XXX ±0.10 .XX°±0.5°	



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>

ROHS
Compatible

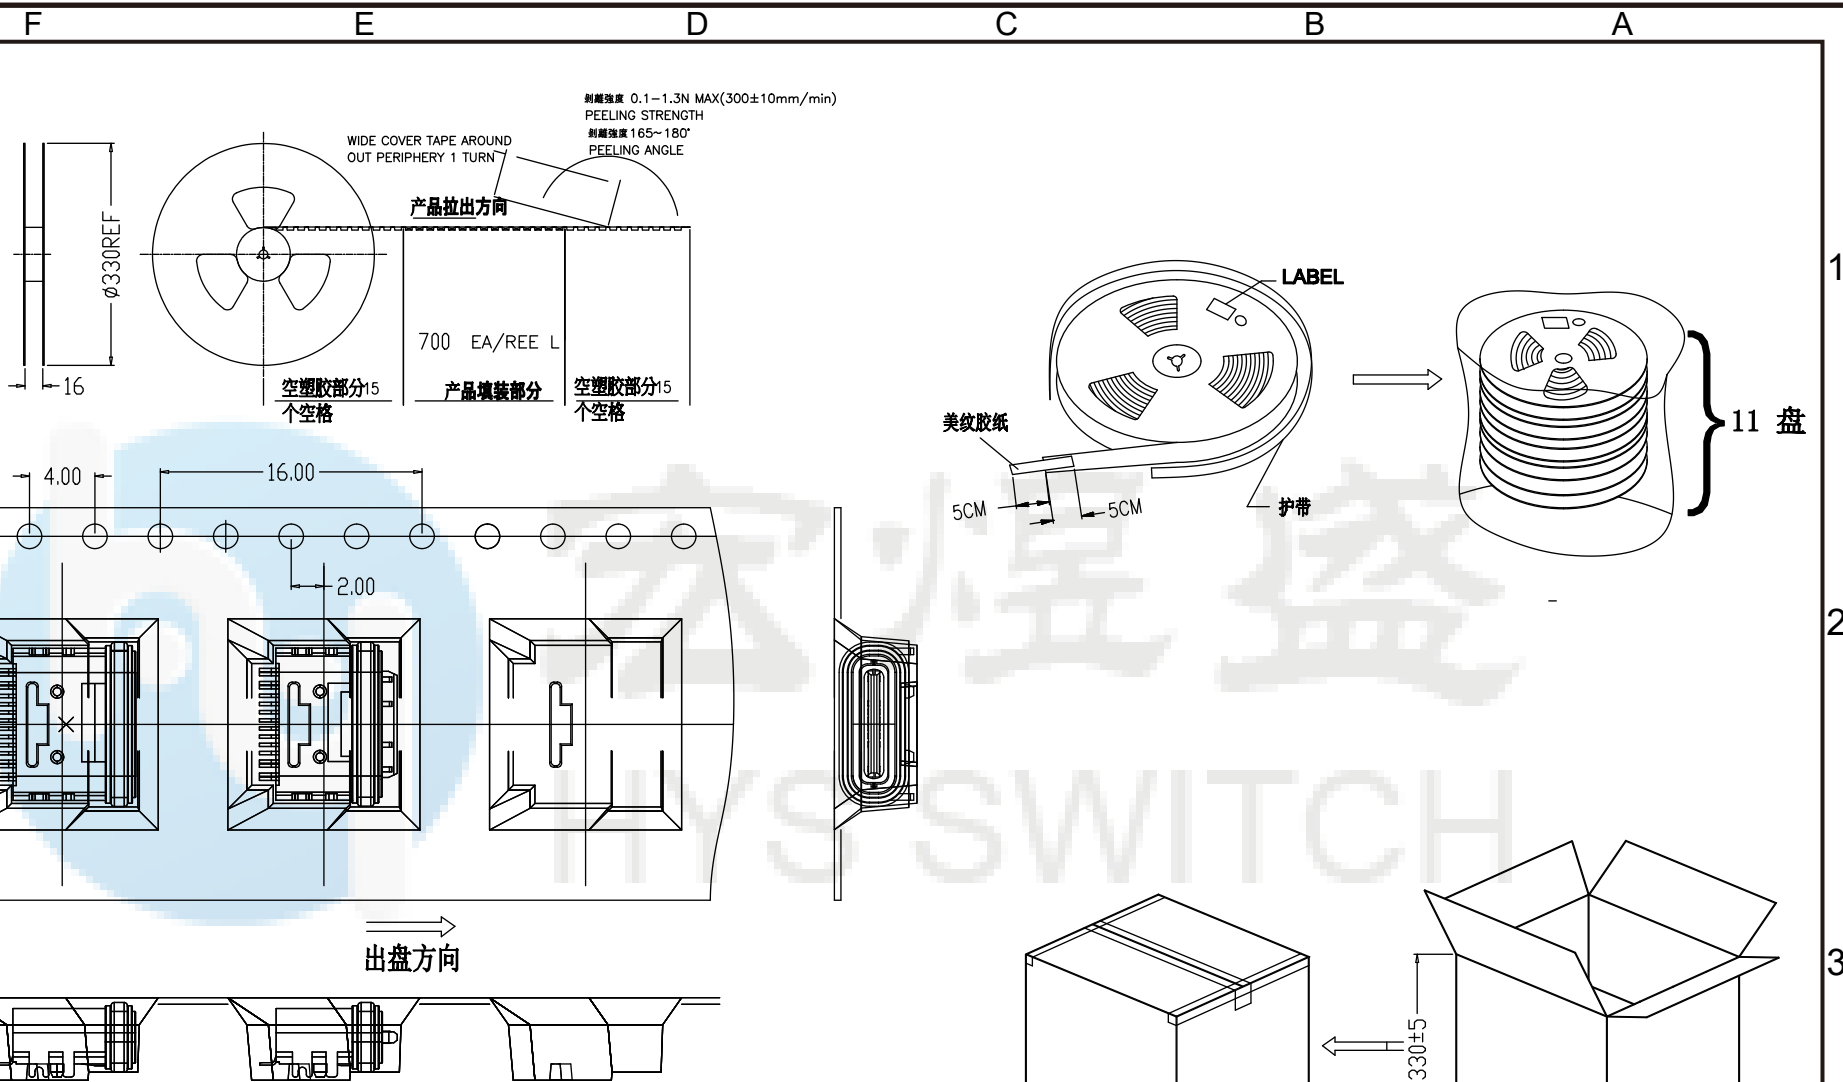

- 说明: 1, 将检查合格的产品, 放入承载带中, 一盘包装700PCS;
2, 将11承载带放入纸箱中;
3, 将纸箱封装好, 贴上标签

每指数量	净重(Kg)	毛重 (Kg)
7700PCS	xxx	xxx

DESIGN	Li Jinwei	SCALL	L		DRAWG NO.	U5279-16PN7.5LF
DRAWING	Wu Qifa	UNIT	mm		TOLERANCE	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		X.X ±0.30 X.°±2°	
APPROVAL	Liu Xiaohong	DATE	2020-06-10		.XX ±0.20 .X° ±1°	
				.XXX ±0.10 .XX°±0.5°	TITLE:	防水16P 板上四脚插板SMT 7.5L IPX7



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>