

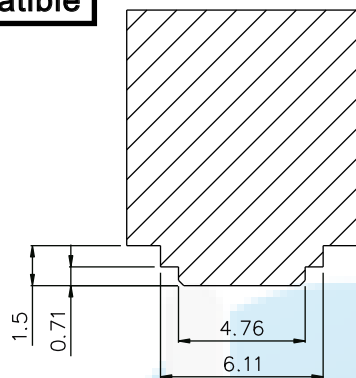
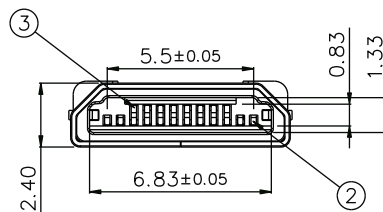


ROHS
Compatible

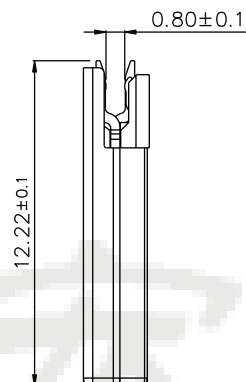

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

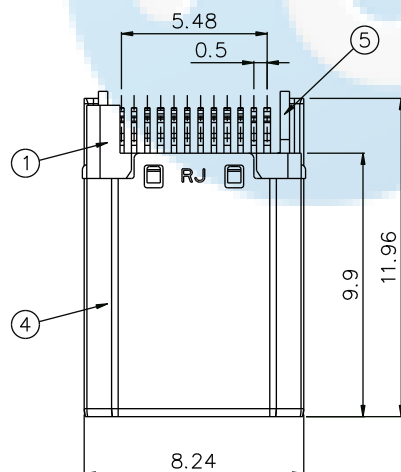

NOTES:

1. MECHANICAL PERFORMANCE,

1-1. INSERTION FORCE: $5\text{N} \sim 20\text{N}$.

1-2. REMOVAL FORCE: $5\text{N} \sim 20\text{N}$.

1-3. DURABILITY: 10000 CYCLES.

2. ELECTRICAL PERFORMANCE,

2-1. CURRENT RATING: 5.0A

2-2. LLCR: VBUS & GND PINS AND OTHER

PINS: $40\text{m}\Omega$ /PIN MAX. SHIELD: $50\text{m}\Omega$ /MAX.

2-3. INSULATION RESISTANCE: $100\text{M}\Omega$ MIN

2-4. DIELECTRIC WITHSTAND VOLTAGE, AC 100V
FOR 1 MINUTE.

3. ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: $-25^\circ\text{C} \sim +85^\circ\text{C}$.

U3 022- 20P 0.8B 11.96L XX X
名称 流水号 PIN位 B:夹板 L:长度 端子电镀规格 A:不带板
01=镀金1U" B:带板8芯焊盘
03=镀金3U" C:带板16芯焊盘
15=镀金15U"
30=镀金30U"

⑤	LATCH	1 PCS	STAINLESS STEEL T=0.35	Ni
④	SHELL	1 PCS	STAINLESS STEEL T=0.15	Ni
③	TERMINAL 2(8Pin)	1SET	COPPER ALLOY T=0.2	Under Plating: Ni Contact Plating: Au
②	TERMINAL 1(12Pin)	1SET	COPPER ALLOY T=0.2	Soldering Plating: Sn
①	HOUSING	1 PCS	HIGH TEMP.THERMOPLASTIC UL94V-0	See item No
NO.	PART NAME	QTY.	MATERIAL	REMARK

DESIGN	Li Jinwei	SCALE	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

ϕ	
TOLERANCE	
X.X ± 0.30	X. $^\circ \pm 2^\circ$
.XX ± 0.20	.X. $^\circ \pm 1^\circ$
.XXX ± 0.10	.XX. $^\circ \pm 0.5^\circ$

DRAWG NO.

U3022-20P0.8B11.96LXXA





TITLE:

STARLINK 公座 20P 夹板0.8mm 11.96L



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>

ROHS
Compatible

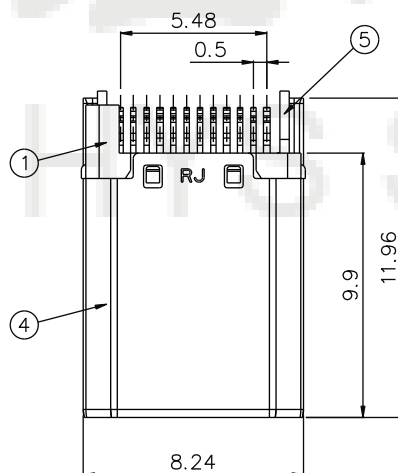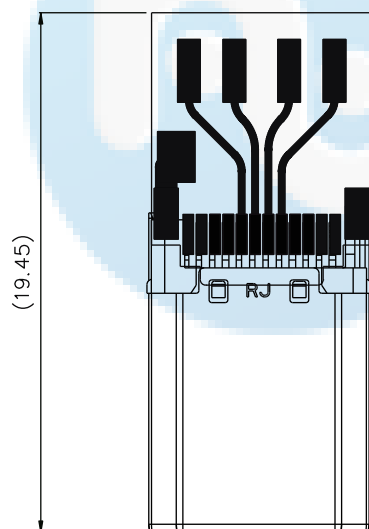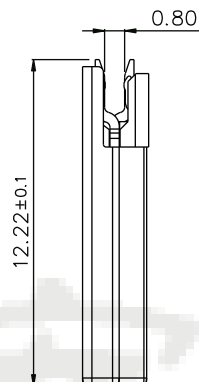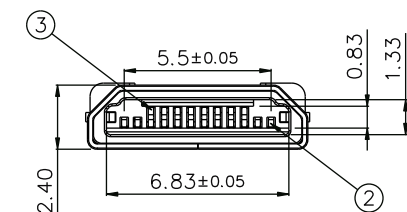

NOTES:
1. MECHANICAL PERFORMANCE,
1-1. INSERTION FORCE: 5N~20N.
1-2. REMOVAL FORCE: 5N~20N.
1-3. DURABILITY: 10000 CYCLES.
2. ELECTRICAL PERFORMANCE,
2-1. CURRENT RATING: 5.0A
2-2. LLCR: VBUS & GND PINS AND OTHER
PINS: 40mΩ/PIN MAX. SHIELD: 50mΩ/MAX.
2-3. INSULATION RESISTANCE: 100MΩ MIN
2-4. DIELECTRIC WITHSTAND VOLTAGE, AC 100V
FOR 1 MINUTE.
3. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25° C~+85° C.

U3 022- 20P 0.8B 19.45L XX X
名称 流水号 PIN位 B;夹板 L;长度 端子电镀规格 A:不带板
01=镀金1U" B:带板8芯焊盘
03=镀金3U" C:带板16芯焊盘
15=镀金15U"
30=镀金30U"

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm


⑤	LATCH	1 PCS	STAINLESS STEEL T=0.35	Ni
④	SHELL	1 PCS	STAINLESS STEEL T=0.15	Ni
③	TERMINAL 2(8Pin)	1SET	COPPER ALLOY T=0.2	Under Plating: Ni Contact Plating: Au
②	TERMINAL 1(12Pin)	1SET	COPPER ALLOY T=0.2	Soldering Plating: Sn
①	HOUSING	1 PCS	HIGH TEMP.THERMOPLASTIC UL94V-0	See item No
NO.	PART NAME	QTY.	MATERIAL	REMARK

DESIGN	Li Jinwei	SCALL		⌀	DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	U3022-20P0.8B19.45LXXB
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.°±2°	TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X°±1°	STARLINK 公座 20P 夹板0.8mm 19.45L
				.XXX ±0.10 .XX°±0.5°	






东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>

ROHS
Compatible

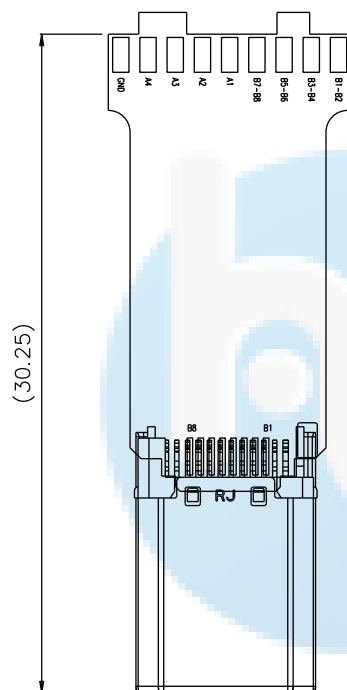

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

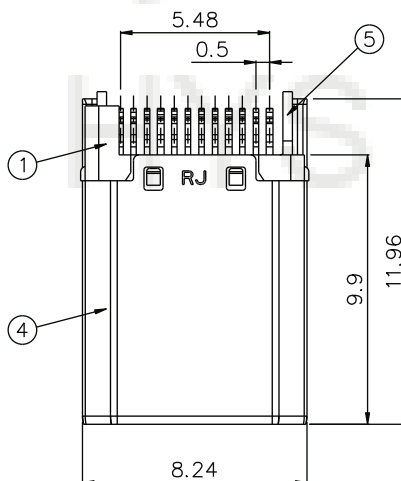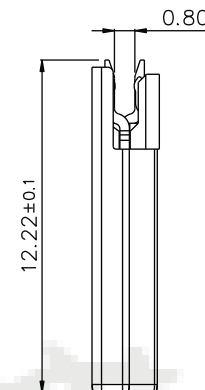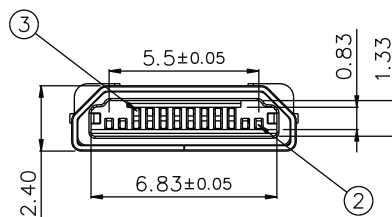

NOTES:

1. MECHANICAL PERFORMANCE,

1-1. INSERTION FORCE: $5\text{N}\sim 20\text{N}$.

1-2. REMOVAL FORCE: $5\text{N}\sim 20\text{N}$.

1-3. DURABILITY: 10000 CYCLES.

2. ELECTRICAL PERFORMANCE,

2-1. CURRENT RATING: 5.0A

2-2. LLCR: VBUS & GND PINS AND OTHER

PINS: $40\text{m}\Omega/\text{PIN}$ MAX. SHIELD: $50\text{m}\Omega/\text{MAX}$.

2-3. INSULATION RESISTANCE: $100\text{M}\Omega/\text{MIN}$

2-4. DIELECTRIC WITHSTAND VOLTAGE, AC 100V
FOR 1 MINUTE.

3. ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.

U3 022- 20P 0.8B 30.25L XX X
↓ ↓ ↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 B;夹板 L;长度 端子电镀规格 A:不带板
01=镀金1U" B:带板8芯焊盘
03=镀金3U" C:带板16芯焊盘
15=镀金15U"
30=镀金30U"

⑤	LATCH	1 PCS	STAINLESS STEEL T=0.35	Ni
④	SHELL	1 PCS	STAINLESS STEEL T=0.15	Ni
③	TERMINAL 2(8Pin)	1SET	COPPER ALLOY T=0.2	Under Plating: Ni Contact Plating: Au
②	TERMINAL 1(12Pin)	1SET	COPPER ALLOY T=0.2	Soldering Plating: Sn
①	HOUSING	1 PCS	HIGH TEMP.THERMOPLASTIC UL94V-0	See item No
NO.	PART NAME	QTY.	MATERIAL	REMARK

DESIGN	Li Jinwei	SCALL			DRAWG NO. U3022-20P0.8B30.25LXXC
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		
				TOLERANCE	TITLE:
				X.X ± 0.30 X. $^{\circ}\pm 2^{\circ}$	STARLINK 公座 20P 夹板0.8mm 30.25L
				.XX ± 0.20 .X. $^{\circ}\pm 1^{\circ}$	
				.XXX ± 0.10 .XX. $^{\circ}\pm 0.5^{\circ}$	



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>