
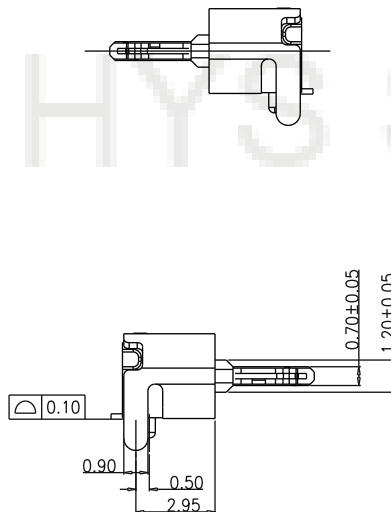
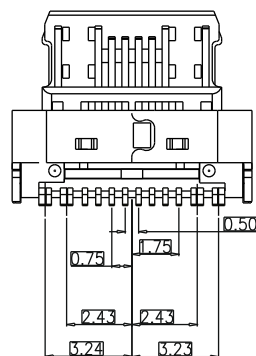
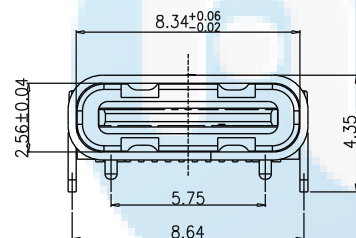
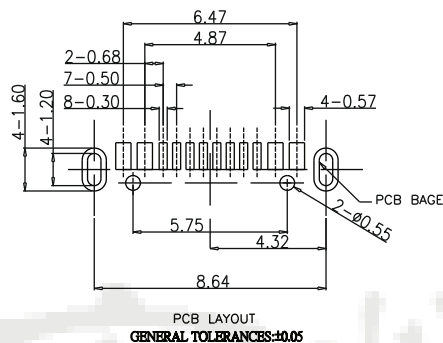


ROHS
Compatible

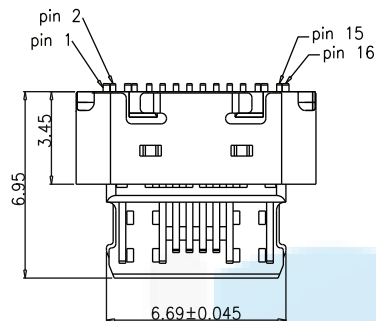

備注:

1.材質:

1.1 端子: C5191R-EH,T=0.15mm.

1.2 胶芯: LCP+30%GF;顏色: 黑色


1.3 外壳: SUS 304R-1/2H.T0.30mm

2. 电镀:

2.1 端子: 电镀镍底50u"Min. (焊接区域) 锡脚电镀亮锡80u"Min.

2.2 外壳: 电镀镍底50u"Min.

U5 085- 16P x x 6.95L
↓ ↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 W;舌头外露 L;长度

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	U5085-16PNW6.95L	 东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com	
DRAWING	Wu Qifa	UNIT	mm		TITLE:			
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		16P板上型两脚插板SMT 舌头外露 带柱 6.95L			
APPROVAL	Liu Xiaohong	DATE	2020-06-10					



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>