

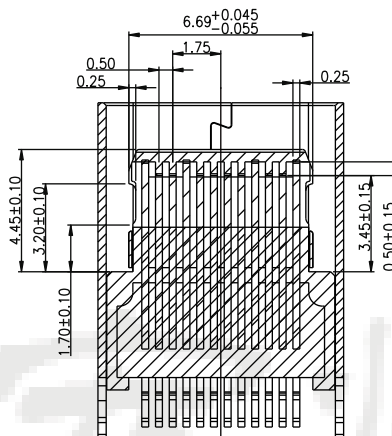
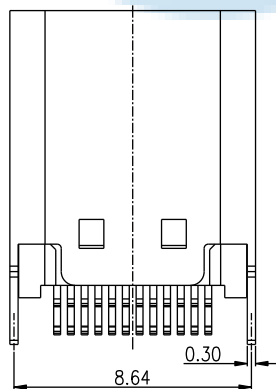
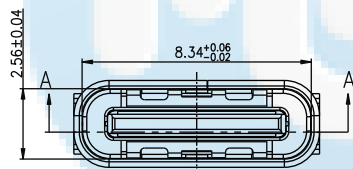
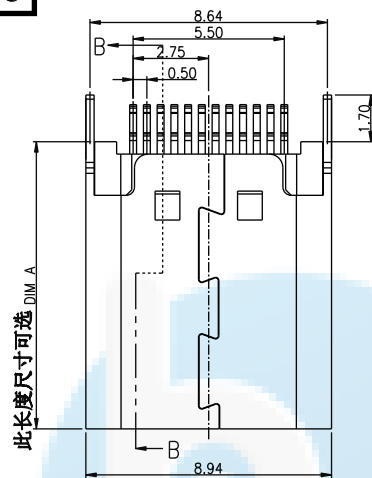


ROHS
Compatible

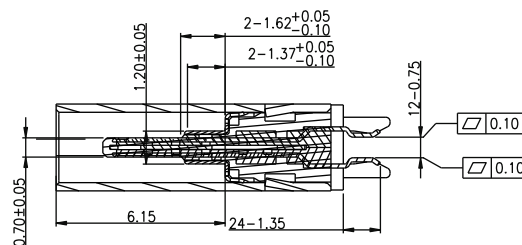


SECTION A-A
SCALE 1:1

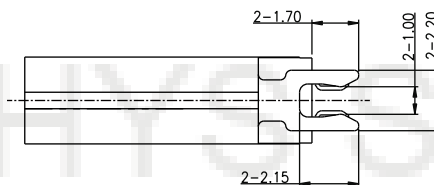

SECTION B-B
SCALE 1:1

U5	214-	24P	x	XXB	XXL
名称	流水号	PIN位	N;母座	B;夹板	L;长度
				0.8	8.8
				1.0	9.3
					10.0
					10.5

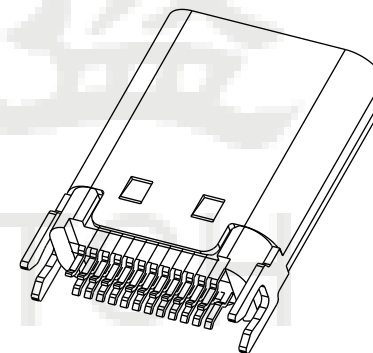


长度可选规格如下

4	10.5
3	10.0
2	9.3
1	8.8
NO	DIM A

DESIGN	Li Jinwei	SCALE			DRAWG NO. U5214-24PNXXBXXL		东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm				
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297				
APPROVAL	Liu Xiaohong	DATE	2020-06-10				
				TOLERANCE			
				X.X ±0.30	X.°±2°		
				.XX ±0.20	.X°±1°		
				.XXX ±0.10	.XX°±0.5°		
				TITLE: 24P 夹板			

ROHS
Compatible

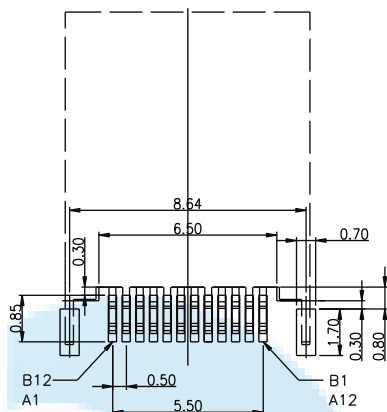

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

	A		B
1	GND	12	GND
2	SSTXp1	11	SSRXp1
3	SSTXn1	10	SSRXn1
4	VBUS	9	VBUS
5	CC1	8	SBU2
6	Dp1	7	Dn2
7	Dn1	6	Dp2
8	SBU1	5	CC2
9	VBUS	4	VBUS
10	SSRXn2	3	SSTXn2
11	SSRXp2	2	SSTXp2
12	GND	1	GND

特性:

一、电气性能: ELECTRICAL

1. 额定电流: 5A
2. 接触阻抗: 40 MILLIOHMS MAX
3. 耐电压: 150V AC / 1 mA MAX
4. 绝缘阻抗: 150V DC/100 MEGA OHMS MIN

二、机械性能:

1. 插入力: 5~20N
2. 拨出力: 8~20N
3. 使用寿命: 10000次、拔出力 6~20N

三、材料: MATERIAL

1. 塑胶: LCP E130I黑色 UL94V-0
2. 端子: C2680/C7025 T=0.15MM
3. 外壳: SUS304 T=0.30MM
4. 接地片: SUS304 T=0.10MM
5. 卡勾: SUS301 T=0.15MM

四、电镀: FINISH

1. 端子: 接触点镀金3U"MIN
PIN脚焊接区域雾锡60U"MIN.

2. 外壳: 镀镍50U"MIN

五、电镀品需做粘锡测试: 粘锡面积达到95%以上。

六、SMT回流焊 (峰值 $265^{\circ}\text{C} \pm 5^{\circ}\text{C}$) 不能起泡、
熔胶、变色不良 (变形在公差范围以内)

七、工作温度: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$


八、盐雾测试: 通过48H在浓度为 $5 \pm 1\%$ 盐水的盐雾测试无生锈
现象

DESIGN	Li Jinwei	SCALE	L		DRAWG NO.		东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com	
DRAWING	Wu Qifa	UNIT	mm		TOLERANCE			U5214-24PNXXBXXL
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°			TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		24P 夹板			

ROHS
Compatible

將成品依同一方向放入真空盤內, 如圖所示。


At same direction, put product onto the tray. Direction refers to below drawing.

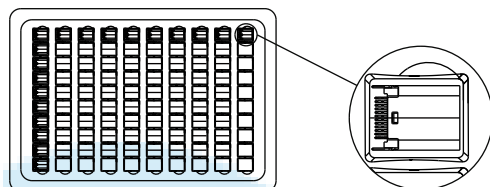

VIEW-1

二.

- 1) 一只紙箱可放置之包裝盤(包括上蓋)見下表。
1) trays per carton, please see next table.
- 2). 每1個紙箱用的包裝數量詳見下表。
2) The Q'ty of products per carton please see next label.
- 3) 將裝滿成品的真空盤用 PE帶捆緊後放在塑膠袋內, 裝完後再封箱。
3) Bind the trays with PE tape and then, put them into the poly bag. Seal the carton with tape.

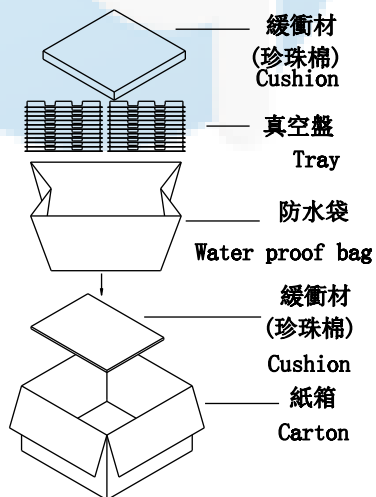

VIEW-2

三.

- 1). 將標籤貼於紙箱側麥上方。
Stick the needful label On the up-right corner of the side of carton.

標籤黏貼處
Location of
Sticking lable

ITEM NO.
Q'TY:
N.W.:
G.W.:

PCS.
KGS.
KGS.

C/NO.
MADE IN TAIWAN

VIEW-3

備 註(REMARK)

1. 若有未裝滿之零數箱, 必須以緩衝材塞滿。
The unfilling-carton must be filled with assuagement.
2. 防水袋需用膠帶貼實且封口。
waterproof plastic bag must be folded up.
3. 裝滿成品后之外箱, 最大堆積箱數: 5箱
About the box fully filled with products, the MAX accumulating quantity of boxes is 5.
4. 如須貼Bar-code, 請依Bar-code作業辦法執行
If barcode lable is required, do it according to the related barcode lable operation standards.

DESIGN	Li Jinwei	SCALL			DRAWG NO.	 东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	U5214-24PNXXBXXL	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.°±2°	TITLE:	
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X°±1°	24P 夹板	
				.XXX ±0.10 .XX°±0.5°		