



ROHS
Compatible

NOTES:


1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VAC RMS;
 - 3.2. CURRENT RATING: 1 AMP;
 - 3.3. CONTACT RESISTANCE: 100mΩ Max.(Initial), 150mΩ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 100 MΩ Min., 500VDC.(Initial), 100 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
 - 4.1. MATING FORCE: 3.0Kgf MAX.;
 - 4.2. UNMATING FORCE: 0.3Kgf MIN.;
 - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
 - 5.1. OPERATION: -25°C~+85°C.
6. WATERPROOF LEVEL: IP67



PJ xA 101- 05 x x
名称 规格 流水号 PIN位 D;插件 F;防水
3.5 5;脚



组装防水示意图



无防水示意图







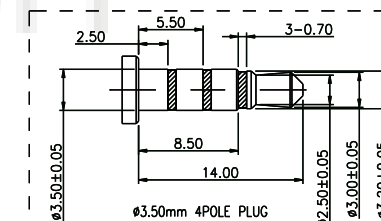


TABLE 1:

⑧	GLUE WATER	1	EPOXY	BLACK	
⑦	Cover	1	HIGH TEMP	BLACK	
⑥	Housing	1	HIGH TEMP	BLACK	
⑤	DETECT PIN	1	STAINLESS STEEL	GOLD FLASH ON CONTACT; GOLD FLASH ON SOLDER AREA; ALL OVER 30u" Ni MIN	T=0.20mm
④	TIP SRPING	1	STAINLESS STEEL		T=0.20mm
③	RING-A	1	STAINLESS STEEL		T=0.20mm
②	RING-B	1	STAINLESS STEEL		T=0.20mm
①	EARTH	1	STAINLESS STEEL		T=0.20mm
NO.	PART NAME	Q'TY	MATERIAL	DESCRIPTION	REMARK

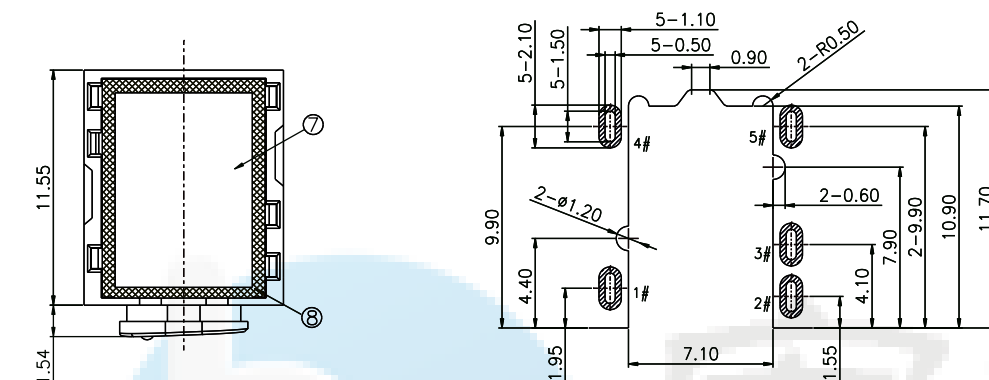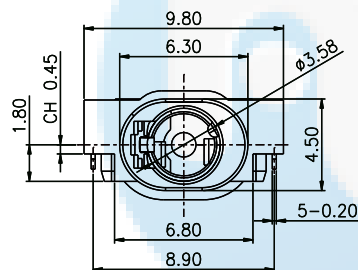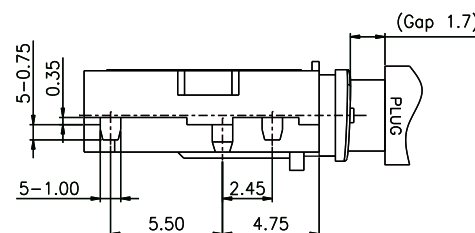

RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLRANCE:±0.05)

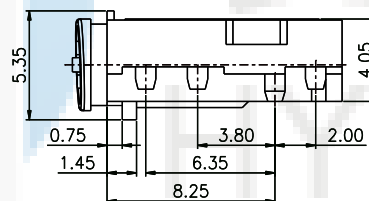

DESIGN	Li Jinwei	SCALL		DRAWG NO.	PJ35A101-05DF	 东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm	TITLE:	Φ3.5mm 防水耳机插座 五脚插板 CH0.45mm	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297			
APPROVAL	Liu Xiaohong	DATE	2020-06-10			