




ROHS
Compatible

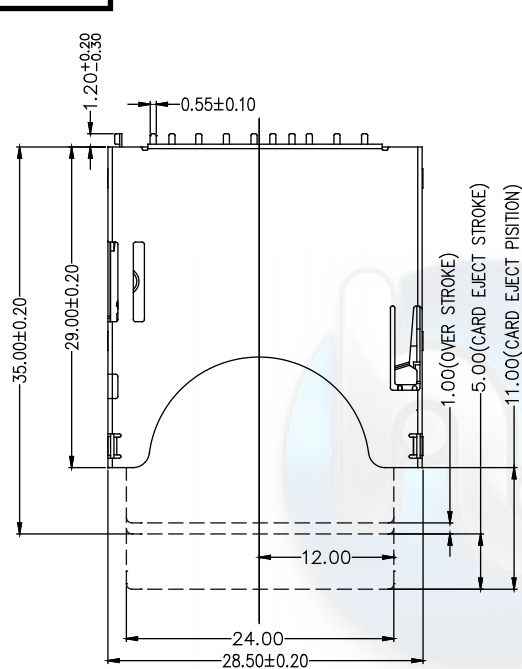

NOTES:

1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.

CONTACT: COPPER ALLOYS.

COVER: COPPER ALLOYS OR STEEL.

2.PLATING:

UNDERPLATE: NICKEL.




CONTACT AREA: GOLD OVER NICKEL.

SOLDER AREA: TIN OVER NICKEL.

3.MULTIMEDIA CARD COMPATIBLE

4.IN COMPLIANCE WITH OUR COMPANY'S LATEST
(ENVIRONMENTAL SUBSTANCE CONTROL
STANDARDS)

Q6 049- 29.0L
名称 流水号 L;长度

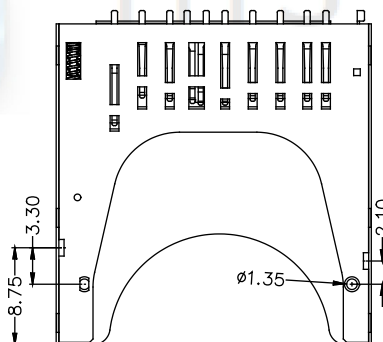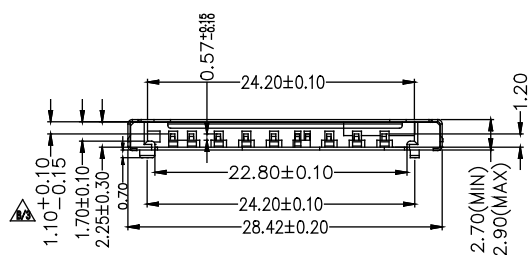

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10








TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	Q6049-29.0L
TITLE:	SD PUSH卡座



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

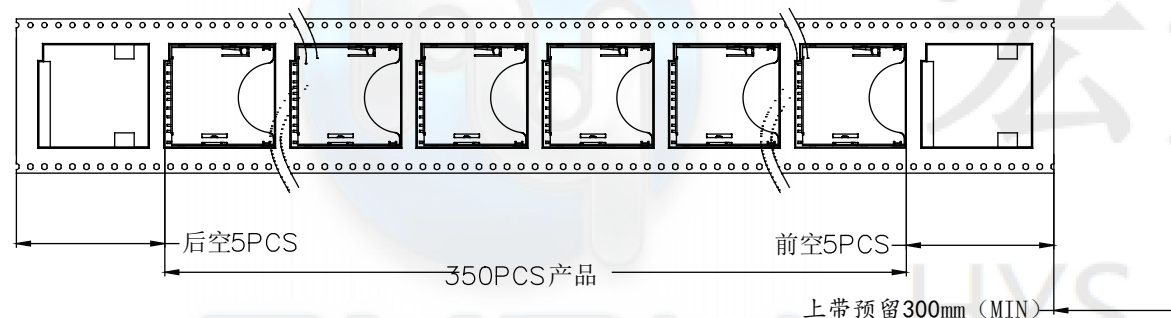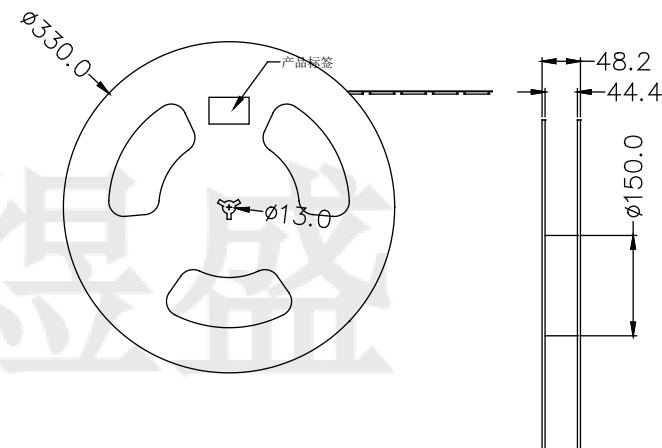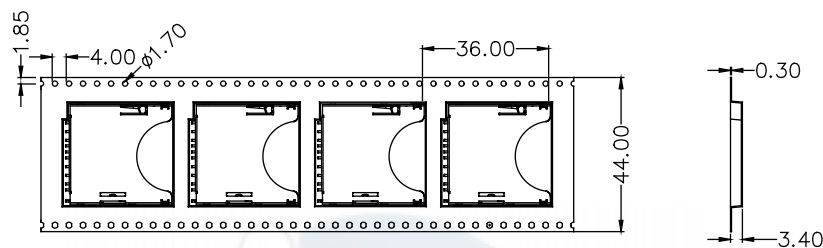

1. 材质要求:
 - 1.1 纸箱材质要求为K=K;两款箱子外形尺寸为35*35*35CM和34.5*34.5*37.5CM。
 - 1.2 卷盘的材质为PS;卷盘的外形尺寸为 $\phi 330 \times 48.2$;
 - 1.3 卷带的材质为PS;卷带的外形尺寸为12960*44.0*3.4mm
2. 包装要求:
 - 2.1 将卷带放入包装机后,前空5PCS,后放产品350PCS,再后空5PCS;上带留300MM长度。
 - 2.2 将包装好的产品从包装机上取下并包装好;
 - 2.3 把累叠好的盘数,粘贴好标签放入纸箱。
 - 2.4 把包装好的成品打包封箱,并在纸箱外贴上标签。
 - 2.5 按照客户实际需求选择合适的箱子。

DESIGN	Li Jinwei	SCALL			DRAWG NO.	Q6049-29.0L
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	TITLE:	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ± 0.30	X.X° $\pm 2^\circ$	SD PUSH卡座
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ± 0.20	.X° $\pm 1^\circ$	
				.XXX ± 0.10	.XX° $\pm 0.5^\circ$	



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>