






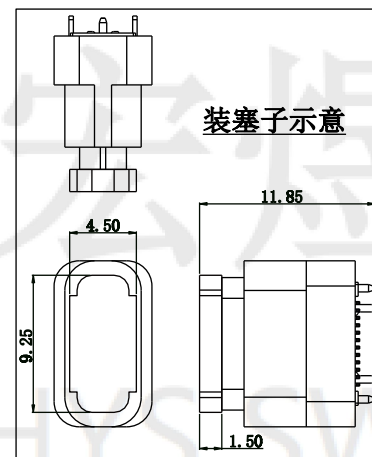


ROHS
Compatible




- NOTES:
1. CURRENT RATING:
5.0A MAX.
 2. DIELECTRIC WITHSTAND VOLTAGE:
100VAC.
 3. TEMPERATURE RANGE:
-30 °C ~ 85 °C.
 4. CONTACT RESISTANCE:
40 MILLIONHM MAX.
 5. INSULATION RESISTANCE:
100 MEGOHMS MIN.
 6. INSERTION FORCE :
5N~20N.
 7. UNMATING FORCE:
8N~20N.
 8. DURABILITY:
10,000 CYCLES.
 9. WATERPROOF RATING: IPX7.
 10. ALL PRODUCTS COMPLY WITH RoHS ENVIRONMENTAL REQUIREMENTS.

U5 330- 24P x 9.3L x
↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 L;长度 F;防水



RECOMMENDED PCB LAYOUT (TOP VIEW)
THICKNESS 1.0±0.10MM;DEFAULT TOLERANCE:±0.05



1. 材料: 绿色硅胶, 符合RoHS环保管理物料.
2. 尺寸: 外径: 10.64±0.10mm.
3. 防水圈密封下压量0.90mm.

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	SSTxp1	SSTxp1	VBUS	CC1	D+	D-	SUB1	VBUS	SSRXn2	SSRXp2	GND
GND	SSRXp1	SSRXn1	VBUS	SUB2	D-	D+	CC1	VBUS	SSTxp2	SSTxp2	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

TABLE:

U5330-24PN9.3LF U5330-24PN9.3LF U5330-24PN9.3LF	环氧树脂		PK13001	颜色: RoHS	
	内壳 护套	S1846A510		SUS304R-1/2LT=0.30mm	Ni50u"Min
		H18020301010		PA66(GF30%)BLACK	/
		中央片	S18428003	SUS304 R-HLT=0.15mm	/
	MD半成品 B180203111009		端子 T18118015 SY11034001	C7026.NM3. 1=0.15mm C7026.NM3. 1=0.15mm	Ni30u"Min AutoCONTACT AREA1u", Solder AREA: 6/P.
		塑胶	SY11034001	LP6(F300) BLACK	/
	P/N		PART NAME	P/N	MATERIALS

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

DRAWG NO.

U5330-24PN9.3LF

TITLE:

防水24P 立式四脚插板SMT 9.3L IPX7



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>