
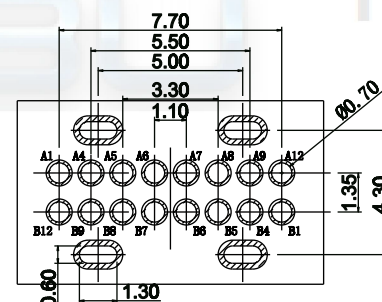

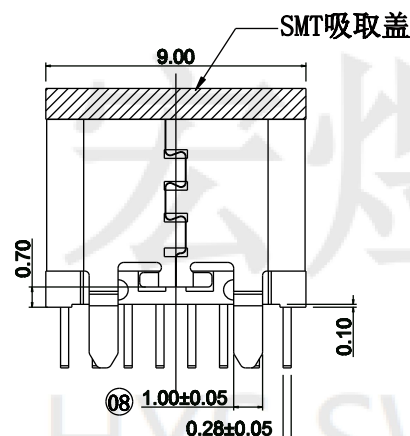
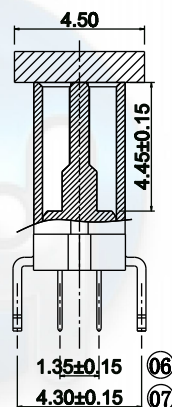
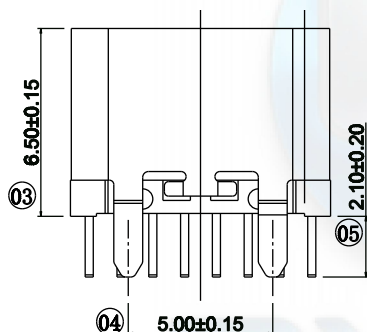



ROHS
Compatible

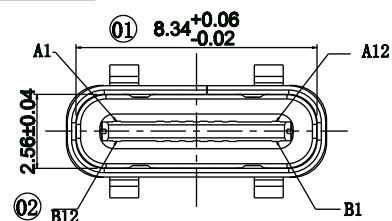

RECOMMENDED PCB LAYOUT (TOP VIEW)

特性:

一、电气性能: ELECTRICAL

1. 额定电流: 5.0A
2. 接触阻抗: 40 MILLIOHMS MAX
3. 耐电压: 100V AC / 1 mA MAX
4. 绝缘阻抗: 150V DC/100 MEGA OHMS MIN

二、机械性能:

1. 插入力: 5~20N 2. 拔出力: 8~20N
3. 使用寿命: 10000次、拔出力 5N MIN

三、材料: MATERIAL

1. 端子: C7025 TM03 T=0.15
2. 中夹片: SUS301 3/4H T=0.15
3. 外壳: SUS304 1/2H T=0.3
4. 塑胶: LCP+30%G.F 黑色

四、电镀: FINISH

1. 端子: 接触点镀金1u"
PIN脚焊接区域镀锡80u"-180u"
2. 外壳: 镀镍50u"Min

五、电镀品需做粘锡测试: 粘锡面积达到95%以上。

六、SMT回流焊 (峰值260°C±5°C) 不能起泡、熔胶、变色不良 (变形在公差范围以内)

七、工作温度: -55°C~+85°C

八、盐雾测试: 通过24H在浓度为5±1%盐水的盐雾测试无生锈现象

U5 383- 16P x 2.1J 6.5L
名称 流水号 PIN位 N;母座 J;脚长 L;长度

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-		VBUS			GND
GND			VBUS		D-	D+	CC1	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1


DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°


DRAWG NO.	U5383-16PN2.1J6.5L
TITLE:	16P 立式四脚插板DIP 脚长2.1mm 6.5L

 **广东宏煜盛电子科技有限公司**
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>



ROHS
Compatible

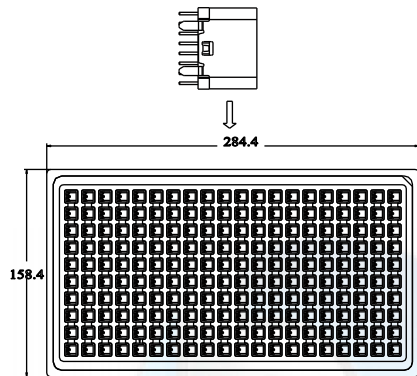

200pcs/盘





10盘/扎X4
5 盘/扎X2

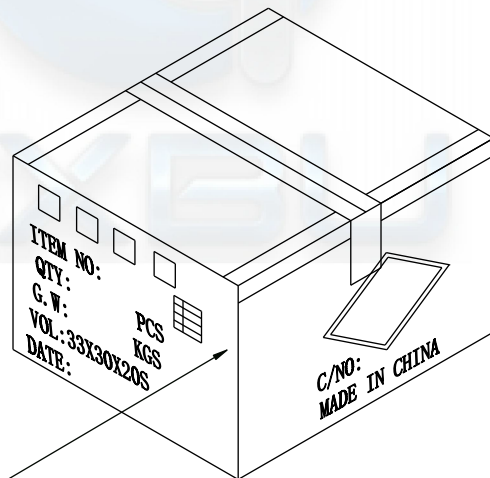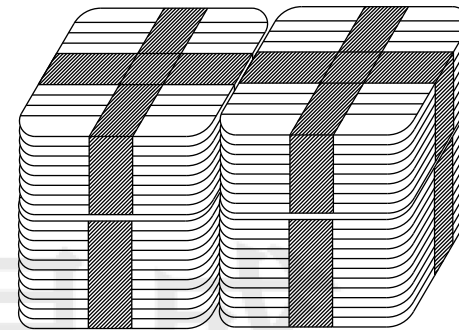


标签粘贴处

10000PCS/箱

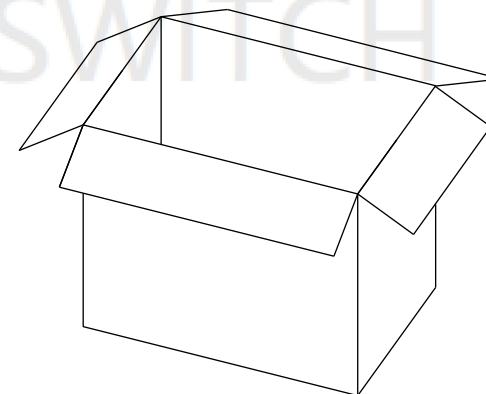

DESIGN	Li Jinwei	SCALL			DRAWG NO.	广东宏煜盛电子科技有限公司 Guangdong Hongyusheng Electronic Technology Co., Ltd. TEL:0752-6632356 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	U5383-16PN2.1J6.5L	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.°±2°	TITLE:	
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X° ±1°	16P 立式四脚插板DIP 脚长2.1mm 6.5L	
				.XXX ±0.10 .XX°±0.5°		




ROHS
Compatible

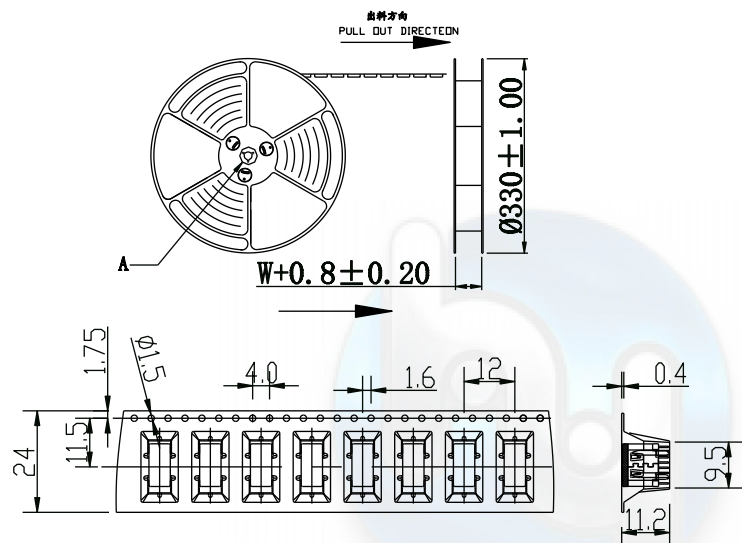


NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTION

2. 上帶 剝力為: $0.1 \sim 1.3N (10.2gf \sim 130gf)$
PEELING OFF FORCE OF TOP TAPE: $0.1 \sim 1.3N (10.2gf \sim 130gf)$
出貨運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

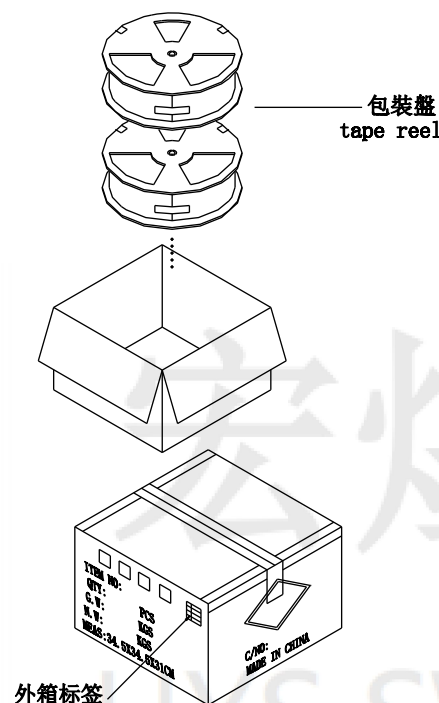

at small positioning hole of the carrier tape side).
標籤黏貼處 (朝捲裝包材的小定位孔一側)
Location of label sticking (label)



NOTE:

1. 每捲包裝數量及每箱裝箱數量如左下表格.
Packing q'ty of each reel & carton as below table shown.
2. 將裝滿產品的卷盤放入紙箱并以膠帶封口
Put reels in the carton and use adhesive tape to seal up.

卷帶	規格: $\phi 330mm$	包裝數量: 500PCS
紙箱	規格: $345mm \times 345mm \times 310mm$	包裝數量: 10盤 (5000PCS)

DESIGN	Li Jinwei	SCALL			DRAWG NO. U5383-16PN2.1J6.5L
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		
				TOLERANCE	TITLE: 16P 立式四腳插板DIP 腳長2.1mm 6.5L
				X.X ± 0.30 X. $^{\circ} \pm 2^{\circ}$	
				.XX ± 0.20 .X. $^{\circ} \pm 1^{\circ}$	
				.XXX ± 0.10 .XX. $^{\circ} \pm 0.5^{\circ}$	



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL: 0752-6632356 <https://www.hystypec.com>