

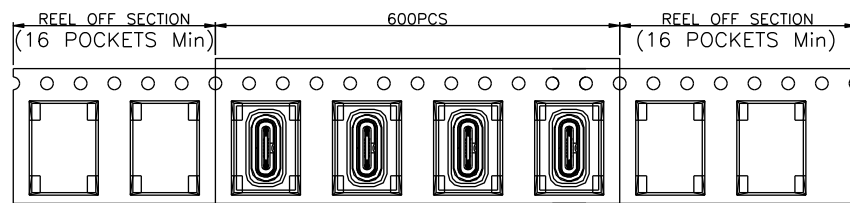


ROHS
Compatible


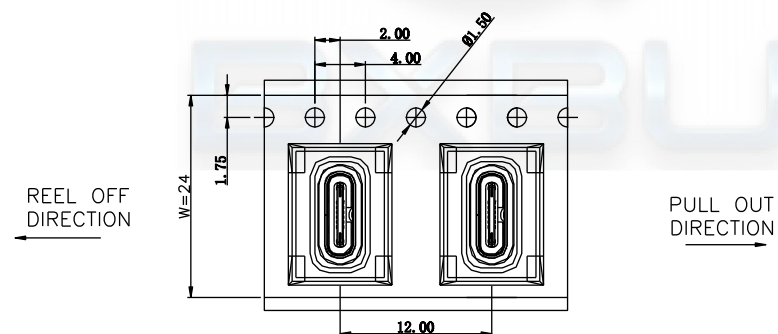


SEE DETAIL X

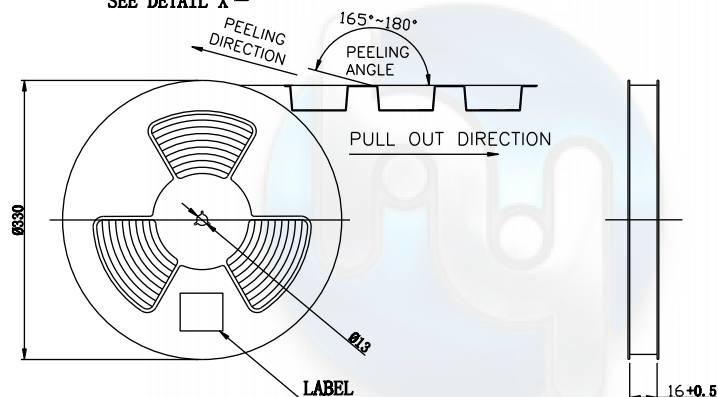

TAPE & REEL 15 PCS

1 REEL
= 600 PCS

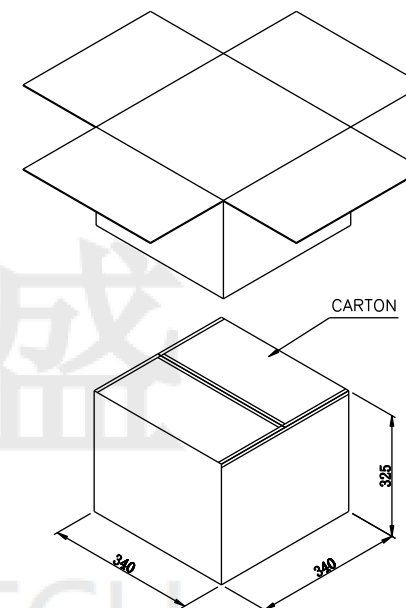

	REEL	CARTON
CONNECTOR (PCS)	600	6000

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X° ±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.

U5401-16PNXXLF

TITLE:

防水16P 立式两脚插板SMT IPX8





广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

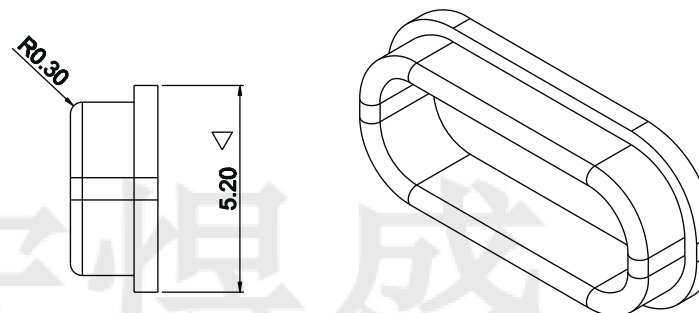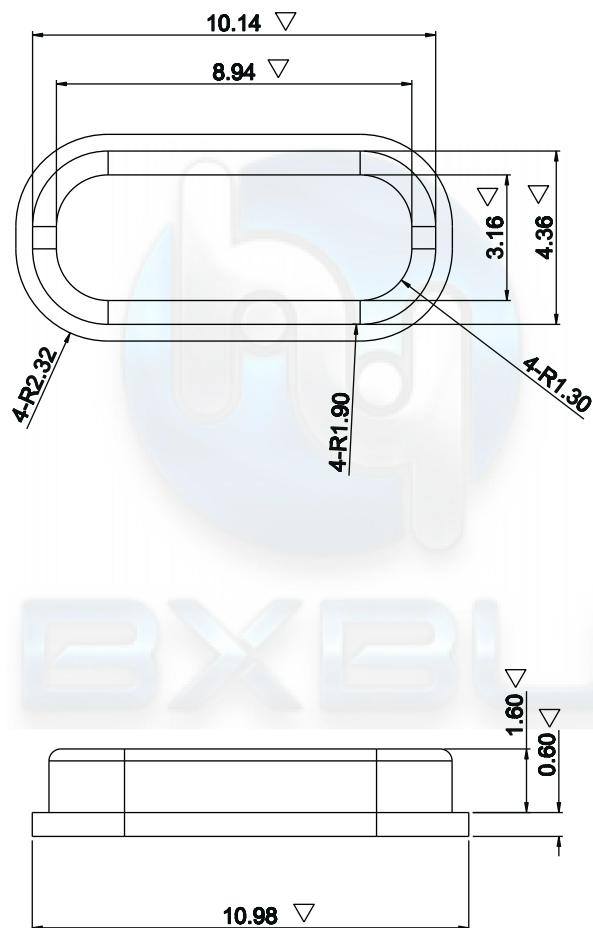

说明:

- 1、材质要求:
 - 1.1 高温硅胶, 黑色, 环保, 无异味;
 - 1.2 材料硬度: 60A±5A
- 2、制程要求:
 - 2.1 切边整齐, 毛边0.03mm最大;
 - 2.2 产品不得有缺角, 多胶等成型不良现象
- 3、检测要求:
 - 3.1 产品表面须光洁、不能出现破损等外观不良;
 - 3.2 产品高温265℃±5℃后无变形, 融胶或烧焦等外观异常现象;
 - 3.3 检验实配为准, 组装后不能超成品图公差;
- 4、包装要求:

产品使用PE袋包装运输过程不得使产品发生损伤等不良现象;
- 5、环保要求:

产品的生产, 包装, 运输, 贮存等过程须符合无卤之规定;
- 6、标识说明:

附 (XX) 为FAI尺寸, ▽ 为重点标示尺寸, 未附为参考尺寸;

DESIGN	Li Jinwei	SCALL			DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	U5401-16PNXXLF
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.°±2°	TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X°±1°	防水16P 立式两脚插板SMT IPX8
				.XXX ±0.10 .XX°±0.5°	



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>