
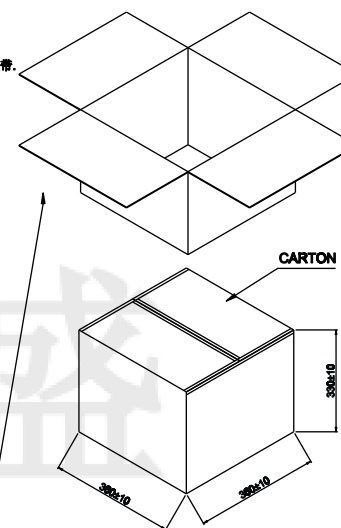

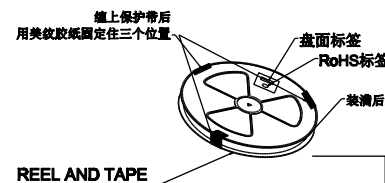
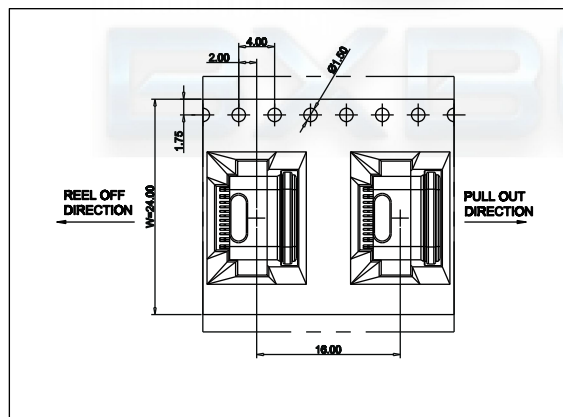
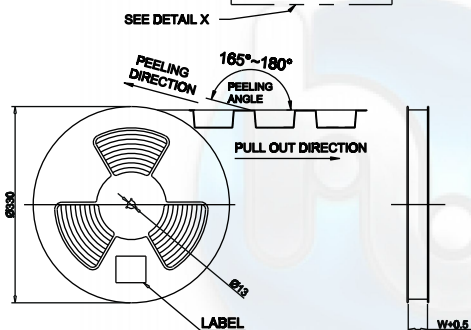


ROHS
Compatible

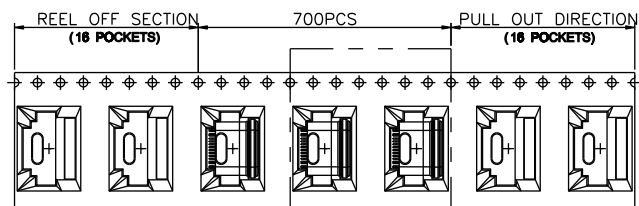

NOTES:

1. 将检查合格的产品, 放入承载带中, 一盘包装500PCS.用自粘上带.
2. 将载带用美纹胶纸把保护带缠绕在载带外圈.并用美纹胶纸固定住卷盘三个位置.
3. 将整盘载带放入真空袋中, 并放入两包干燥剂.
4. 将装入载带的真空袋放入真空机进行抽真空(检查是否放干燥剂).
抽真空完成后, 检查载带是否挤压变形, 是否漏气.并贴上标签.
5. 将抽完真空的整盘产品放入纸箱:
700PCS/盘 * 10盘 = 7000PCS/箱.
6. 装入纸箱完成后, 进行封箱.外箱上按要求贴上外箱标签.

CONNECTOR (PCS)	REEL	CARTON
	700	7000

DESIGN	Li Jinwei	SCALL			DRAWG NO. U5437-16PN7.45LF
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		

TOLERANCE
X.X ±0.30 X.°±2°
.XX ±0.20 .X°±1°
.XXX ±0.10 .XX°±0.5°

TITLE:
防水16P板上四脚插板SMT 7.45L IPX7



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>