



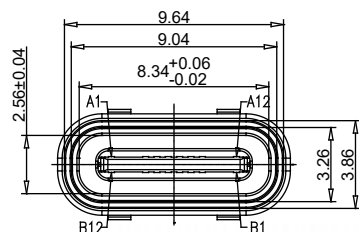





ROHS
Compatible

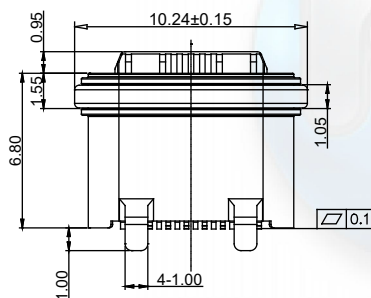

装前示意图

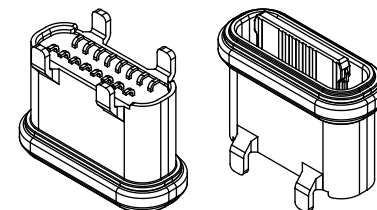

NOTES:

SPECIFICATION:

- 1.CURRENT RATING: 3.0 A
- 2.VOLTAGE RATING: 3.0 V
- 3.VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX
SHIELD: 50mΩ/MAX
LLCR MAX. CHANGE OF ALL PINS: 10Ωm
- 4.INSULATION RESISTANCE: 100MΩ MIN
- 5.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1MINUTE
- 6.INSERTION FORCE: 0.5~2.0kgf
- 7.UNMATING FORCE: 0.8-2.0kgf
- 8.DURABILITY: 10000 CYCLES
- 9.OPERATING TEMPERATURE: -35°C~+85°C
- 10.THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 210-230°C
- 11.WATERPROOF:IP-X7.

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

U5 475- 16P x x 6.8L x
名称 流水号 PIN位 N;母座 W;舌头外露 L;长度 F;防水

TABLE:


NO	PART	QTY	Material
1	SHELL	1	ZINC ALLOY,Ni30u"Min PLATED
2	CONTACT	16	C7025,TIN80u"/Au3u"/Ni30u"PLATED
3	MID PLATE	1	SUS301,NO PLATING
4	HOUSING	1	LCP(E130I) UL94 V-0 BLACK
5	CAP	1	LCP UL94 V-0 BLACK
6	WATERPROOF RING	1	SILICONE(SI/60-65A) UL94 V-0 BLACK

DESIGN	Li Jinwei	SCALL			DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm		U5475-16PNW6.8LF
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		防水16P 立式四脚插板SMT 舌头外露0.95mm 6.8L IPX7





广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

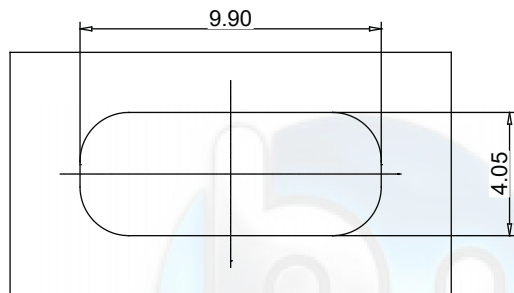

密封开孔参考尺寸(只供参考)
组装外壳时需要打环保润滑油

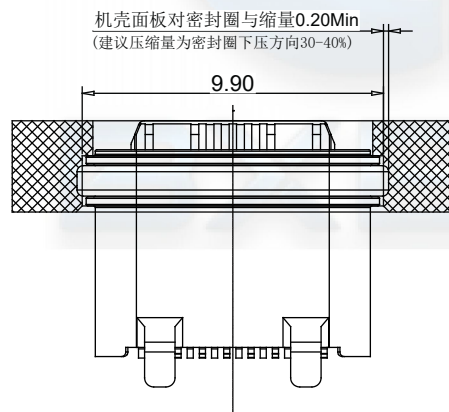

DESIGN	Li Jinwei	SCALL			DRAWG NO.	U5475-16PNW6.8LF
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.°±2°	TITLE:	防水16P 立式四脚插板SMT 舌头外露0.95mm 6.8L IPX7
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X° ±1°		
				.XXX ±0.10 .XX°±0.5°		





广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

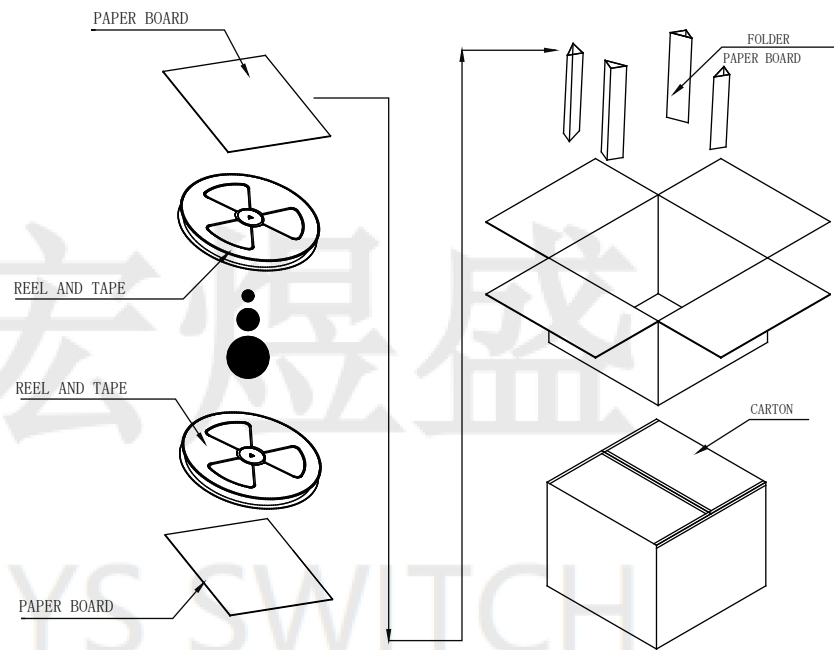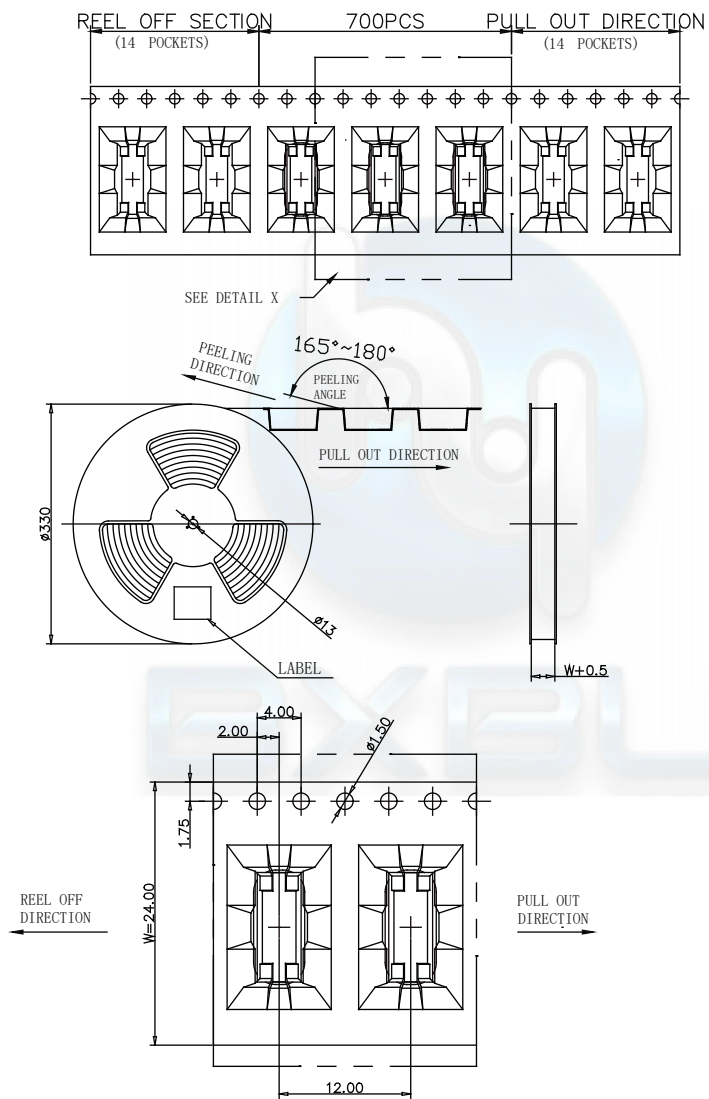

	REEL	CARTON
CONNECTOR (PCS)	500	5000

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5475-16PNW6.8LF
TITLE:	防水16P 立式四脚插板SMT 舌头外露0.95mm 6.8L IPX7



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>