

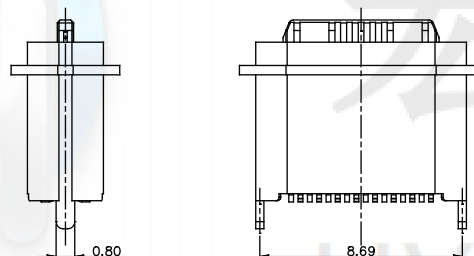


- 1.CURRENT RATING: 3.0 A
- 2.VOLTAGE RATING: 3.0 V
- 3.VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX
SHIELD: 50mΩ/MAX
LLCR MAX. CHANGE OF ALL PINS: 10Ωm
- 4.INSULATION RESISTANCE: 100MΩ MIN
- 5.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1MINUTE
- 6.LNSERTION FORCE: 0.5~2.0kgf
- 7.UNMATING FORCE: 0.8-2.0kgf
- 8.DURABILITY: 10000 CYCLES
- 9.OPERATING TEMPERATURE: -35°C~+85°C
- 10.THE PEAK TEMPERATURE ON THE BOARO SHALL
BE MAINTAINED FOR 10 SECONDS AT 210-230°C
- 11.WATERPROOF:IP-X7.



U5	476-	16P	x	x	6.8L	x
↓	↓	↓	↓	↓	↓	↓
名称	流水号	PIN位	N;母座	W;舌头外露	L;长度	F;防水

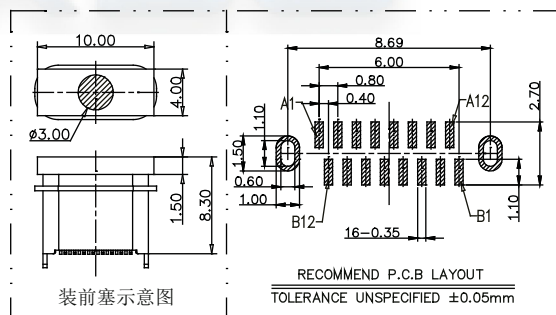

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

TABLE:			A12	GND	B1	GND
NO	PART	Q'TY	Material			
1	SHELL	1	ZINC ALLOY,Ni30u"Min PLATED			
2	CONTACT	16	C7025,TIN80u"/Au3u"/Ni30u"PLATED			
3	MID PLATE	1	SUS301,NO PLATING			
4	HOUSING	1	LCP(E130i) UL94 V-0 BLACK			
5	CAP	1	LCP UL94 V-0 BLACK			
6	WATERPROOF RING	1	SILICONE(SI/60-65A) UL94 V-0 BLACK			

DESIGN	Li Jinwei	SCALL			DRAWG NO.	
DRAWING	Wu Qifa	UNIT	mm		TOLERANCE	U5476-16PNW6.8LF
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		X.X ±0.30 X.°±2° .XX ±0.20 X.° ±1° .XXX ±0.10 .XX°±0.5°	TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10			防水16P 立式两脚插板SMT 舌头外露0.95mm 6.8L IPX7




广东宏煜盛电子科技有限公司



Guangdong Hongyusheng Electronic Technology Co., Ltd.

EXBU TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

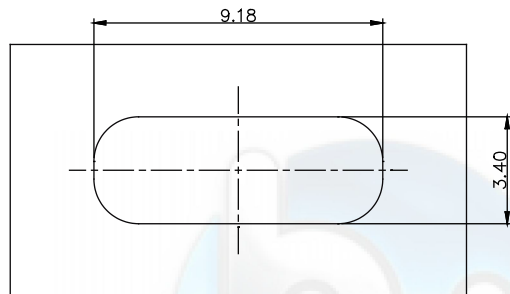

密封开孔参考尺寸(只供参考)
组装外壳时需要打环保润滑油

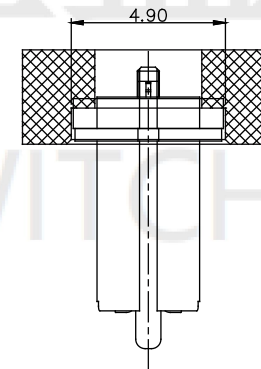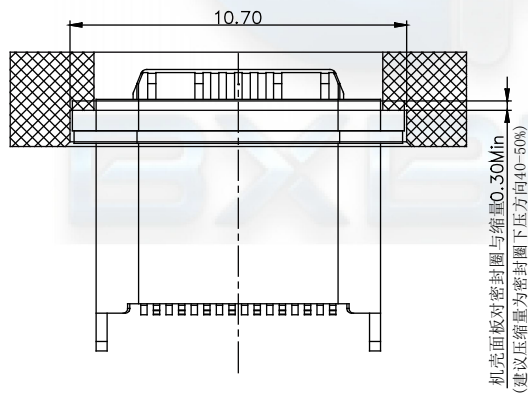


DESIGN	Li Jinwei	SCALL			DRAWG NO.	U5476-16PNW6.8LF
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.°±2°	TITLE:	防水16P 立式两脚插板SMT 舌头外露0.95mm 6.8L IPX7
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X°±1°		
				.XXX ±0.10 .XX°±0.5°		





广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

REEL OFF SECTION 700PCS PULL OUT DIRECTION
(14 POCKETS) (14 POCKETS)

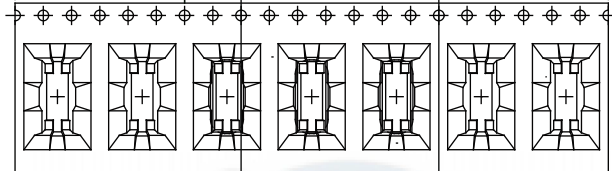

SEE DETAIL X

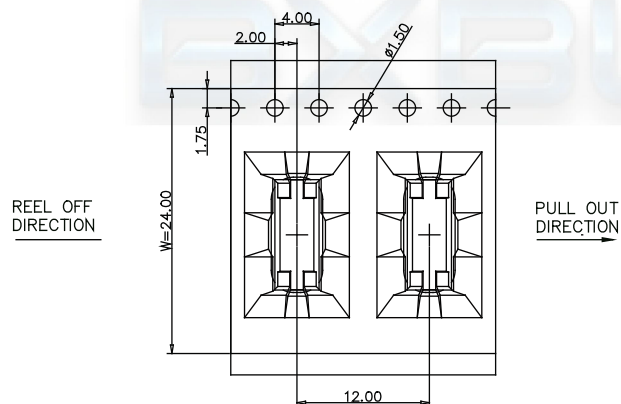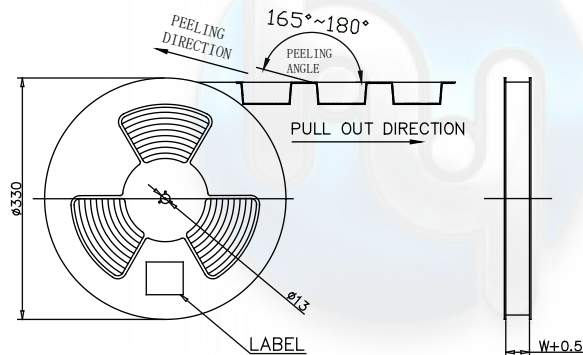

PAPER BOARD

REEL AND TAPE

REEL AND TAPE

PAPER BOARD

FOLDER
PAPER BOARD

CARTON

	REEL	CARTON
CONNECTOR (PCS)	500	5000

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.° ±2°
.XX ±0.20	.X° ±1°
.XXX ±0.10	.XX° ±0.5°

DRAWG NO.	U5476-16PNW6.8LF
TITLE:	防水16P 立式两脚插板SMT 舌头外露0.95mm 6.8L IPX7



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>