
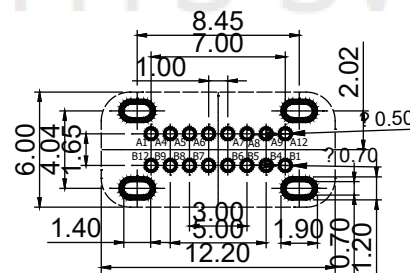
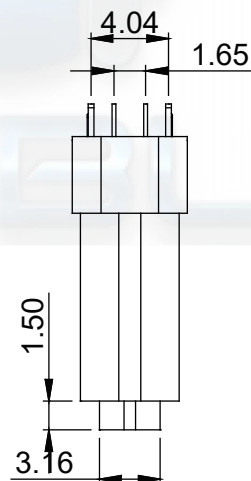
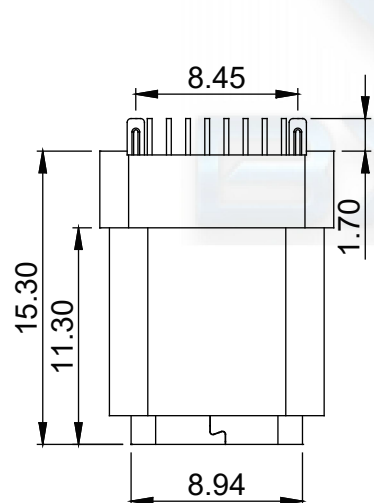





ROHS
Compatible

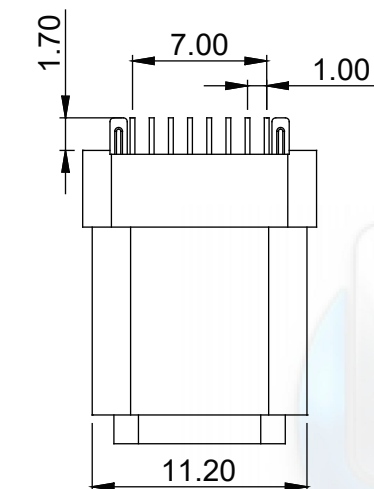

RECOMMENDED PCB LAYOUT(TOP VIEW)T=1.60
DEFAULT TOLERANCE:±0.05

备注:

1.材质:

1.1 胶芯: LCP+30%G.F.UL94V-0.

1.2 端子: 高导电.T=0.20mm.半金镀1μ".

1.3 外壳: SUS304, T=0.30mm; 镀镍80μ" Min.

1.4 钢片: SUS301, T=0.15mm;

1.5 护套: PA9T.黑色.

1.6 环氧树脂: 黑色.

2.电镀: (具体规格参照客户要求).

2.1 端子: 接触区域镀金&镀锡.

焊接区域镀锡80U" & 镀金G/F.

2.2 外壳: 镀可焊镍50U"MIN.

2.3 盐雾: 24H. (具体规格参照客户要求).

3.主要特性:

3.1 额定电流: 5.0A.

3.2 接触阻抗: 40 MILLTOHMS Max.

3.3 绝缘阻抗: 150V DC/1000 MQ.

3.4 耐压测试: 100V AC/ 1 mA Max.

3.5 沾锡性: 温度260±5℃, 时间5±0.5s.

3.6 插入力: 5~20N 2.拔出力: 8~20N.

耐久: 10000次. 拔出力 5~20N.

3.7 工作温度: -55℃~+80℃.

4. 标示"⊗"为首件, 重点检验尺寸.

5. 标示"▽"为FAI尺寸序号.

6. 所有产品符合RoHS环保要求.

U5 487- 16P x 15.3L x
名称 流水号 PIN位 N;母座 L;长度 F;防水

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-		VBUS			GND
GND			VBUS		D-	D+	CC1	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

DESIGN	Li Jinwei	SCALL		⌀	DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	U5487-16PN15.3LF
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.°±2°	TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X°±1°	防水16P 立式四脚插板DIP 15.3L IPX7
				.XXX ±0.10 .XX°±0.5°	





广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

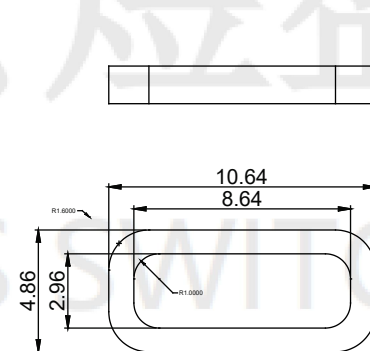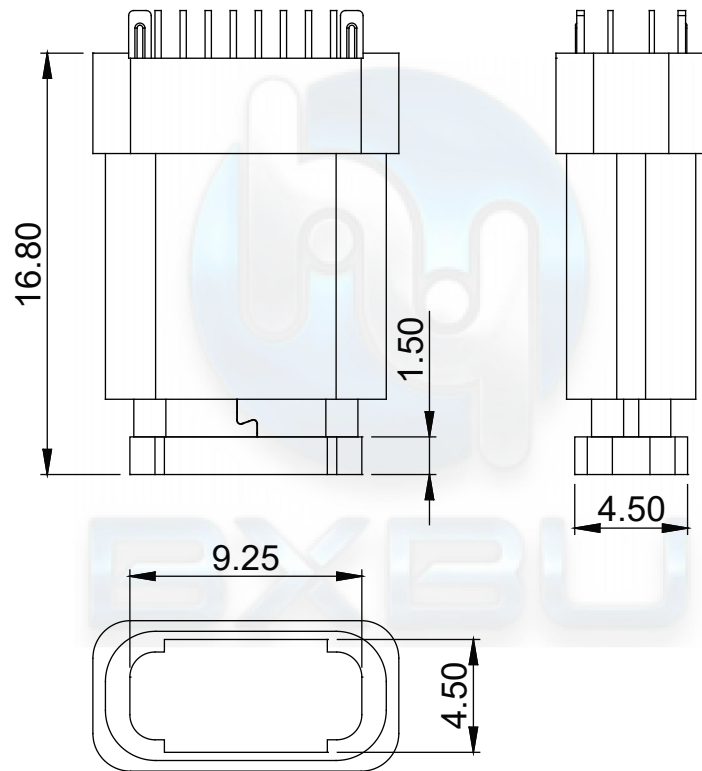

建议防水圈尺寸

DESIGN	Li Jinwei	SCALL			DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	U5487-16PN15.3LF
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.°±2°	TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X° ±1°	防水16P 立式四脚插板DIP 15.3L IPX7
				.XXX ±0.10 .XX°±0.5°	



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>