
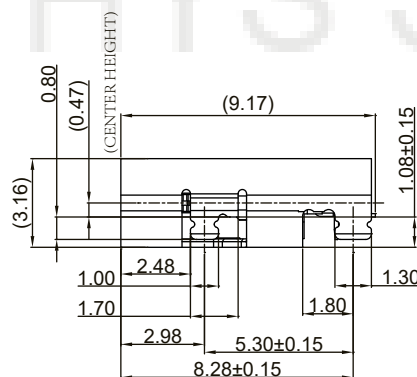
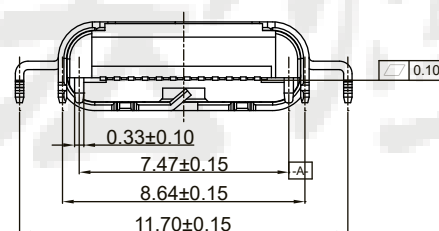
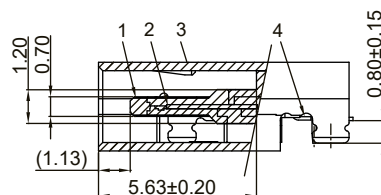
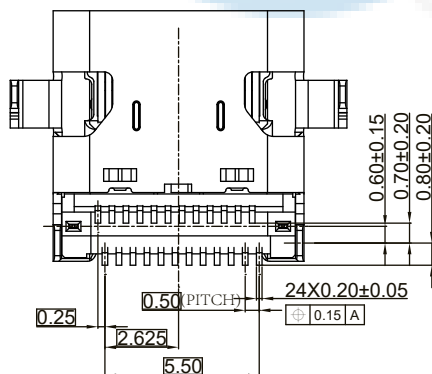
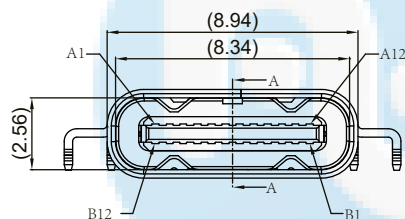


ROHS
Compatible

支持USB4高速传输

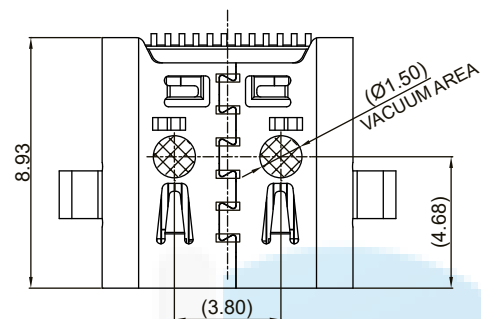

NOTE/注释:

1. SPECIFICATION/规格

- 1.1 Rated current (额定电流): 5.0A
- 1.2 Voltage rating (额定电压): 5V AC
- 1.3 Contact Resistance (接触电阻): 40mΩ Max.
- 1.4 Insulation Resistance (绝缘电阻): 100 Min.
- 1.5 Withstanding voltage (耐电压): 100 VAC/minute
- 1.6 Mating force (插入力): 5~20N.
- 1.7 Unmating force (拔出力): 8~20N.
- 1.8 Durability Cycle (寿命循环): 10,000
- 1.9 Operating temperature (工作温度): -40°~+85°

U5 196- 24P x 1.1C 9.17L XX
↓ ↓ ↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 C;沉板 L;长度 端子电镀规格
01=镀金1u"
03=镀金3u"
05=镀金5u"
15=镀金15u"
30=镀金30u"

PIN ASSIGNMENT

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND


DESIGN	Li Jinwei	SCALL			DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm		U5196-24PN1.1C9.17LXX
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		24P沉板1.1mm无后盖单壳双贴SMT 9.17L



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>

ROHS



Compatible

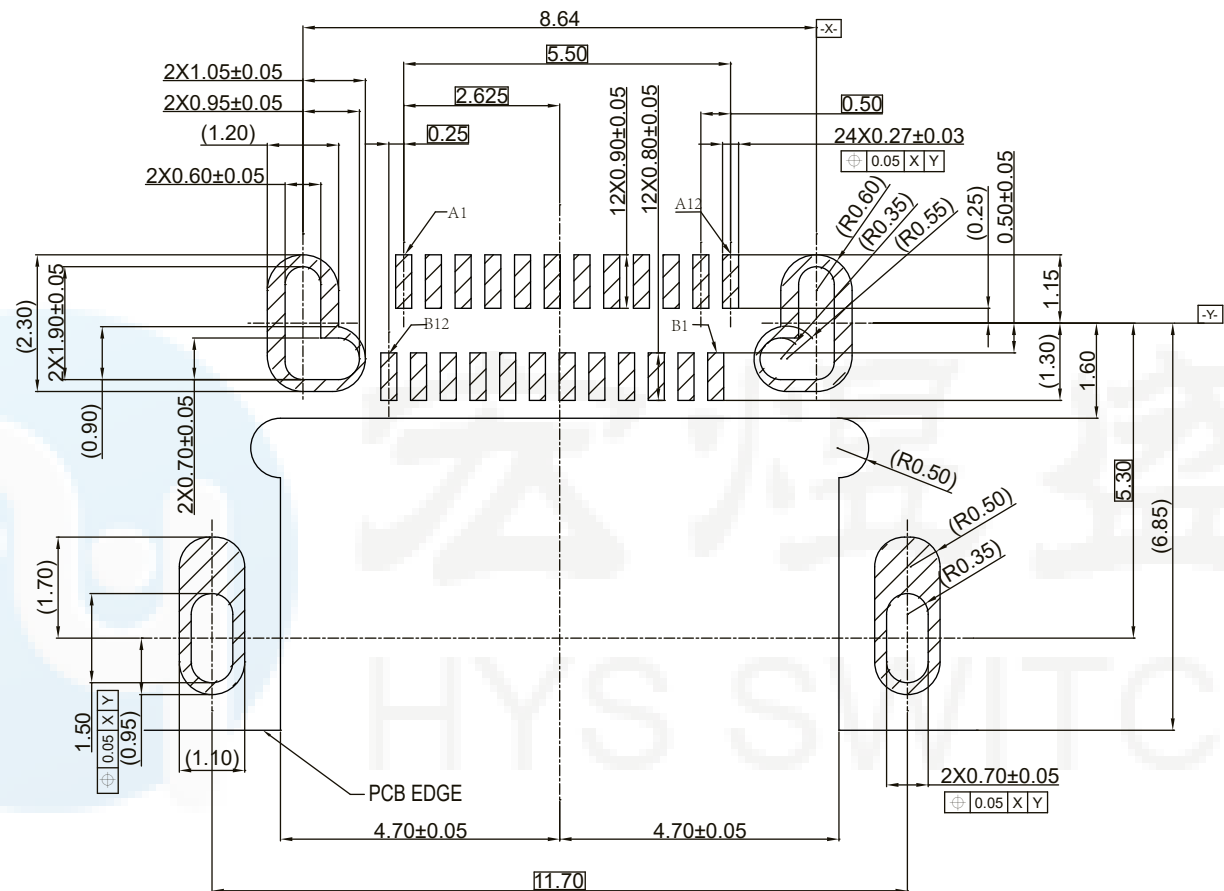

4	TERMINAL	24	C18140	MATING SIDE:SEE PART NO; SOLDER TAIL:Gold FLASH, 50u" NICKEL OVERALL.	T=0.12
3	SHELL	1	SUS304	NICKEL PLATING	T=0.30
2	MID PLATE	1	SUS301	NICKEL PLATING	T=0.15
1	MAIN HOUSING	1	PA9T HF 30%玻纤, UL94 V-0, 黑色		BLACK UL94V0
ITEM	DESCRIPTION	QTY	MATERIAL	FINISH	REMARK
BILL OF MATERIAL					

DESIGN	Li Jinwei	SC ALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 X.° ±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	 东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm		U5196-24PN1.1C9.17LXX	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:	
APPROVAL	Liu Xiaohong	DATE	2020-06-10		24P沉板1.1mm无后盖单壳双贴SMT 9.17L	

ROHS
Compatible

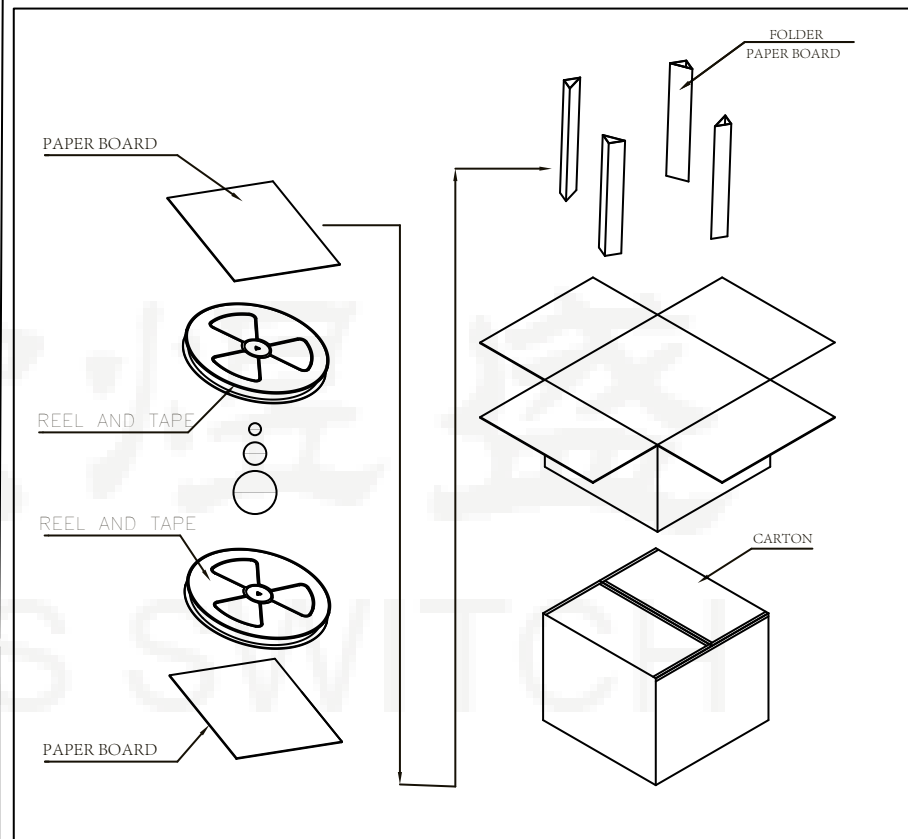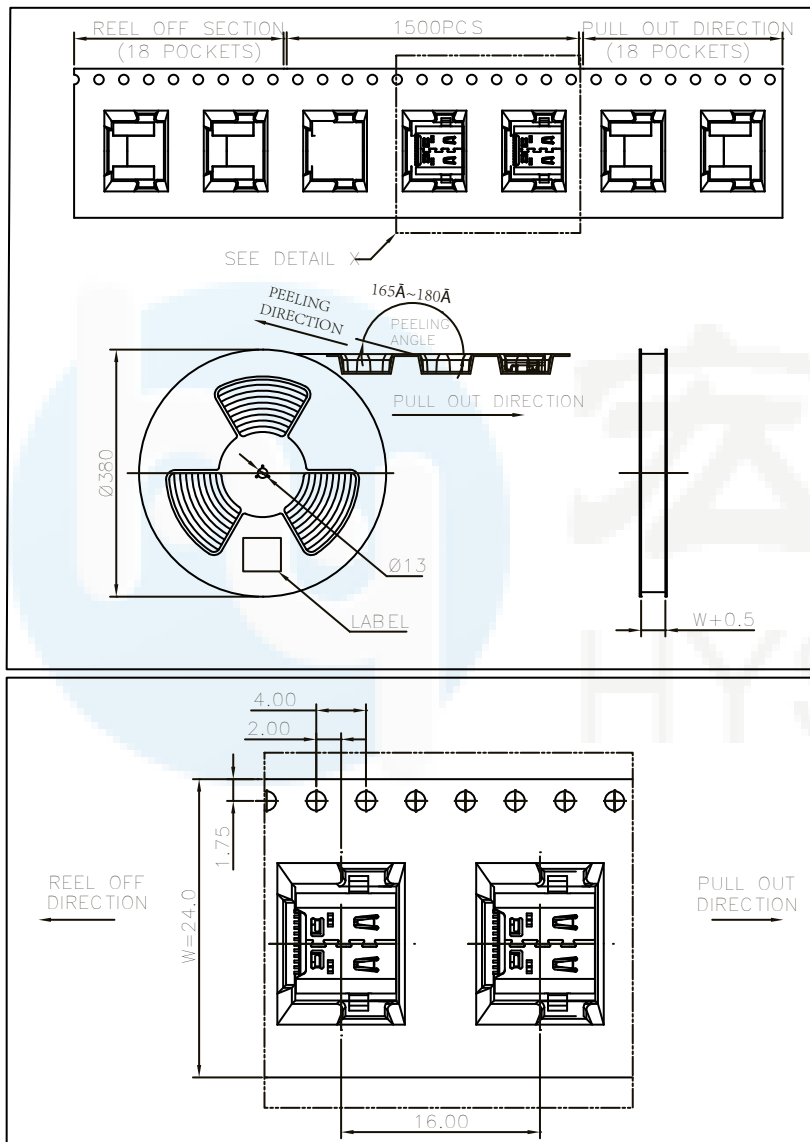

	REEL	CARTON
CONNECTOR (PCS)	1500	15000

DESIGN	Li Jinwei	SC ALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5196-24PN1.1C9.17LXX
TITLE:	24P沉板1.1mm无后盖单壳双贴SMT 9.17L



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>