

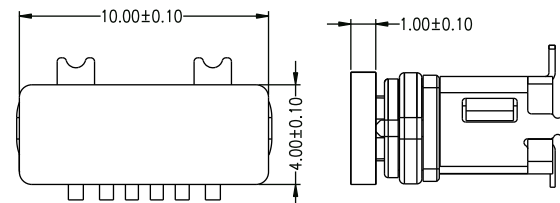
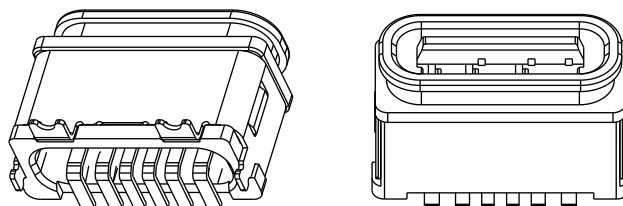

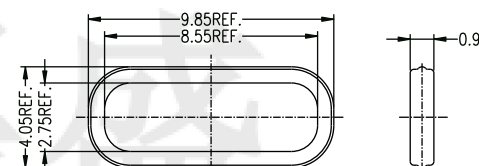


ROHS
Compatible

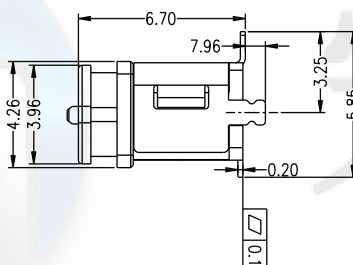

Cap dimensions



建议防水圈

Note:

1.Material:

1.1 Housing: PA9T

1.2 Contact:C5191,t=0.20mm

1.3 InnerHousing: PA9T

1.4 OutShell: SUS304,

1.5 Middle plate: SUS t=0.2mm.

2.ELECTRICAL:

2-1:CURRENT RATING:

VBUS AND GND CONTACTS RATED AT 1.5A
PARALLELED FOR A TOTAL OF 3A;

2-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS

2-3:DIELECTRIC WITHSTANDING VOLTAGE:

100V AC MIN;

3:MECHANICAL CHARACTERISTICS:

3-1:MATING FORCE:5~20N

3-2:UNMATING FORCE:8~20N(INITIAL),


6~20N(AFTER 10000 CYCLES)

3-3:FREQUENCY: 200±50 CYCLES /HOUR,10000 CYCLES


3-4:OPERATING TEMPERATURE ;-40°~80°.

4: WATERPROOF: IP-X8.

U5 260- 06P x 6.6L x
名称 流水号 PIN位 N;插座 L;长度 F;防水

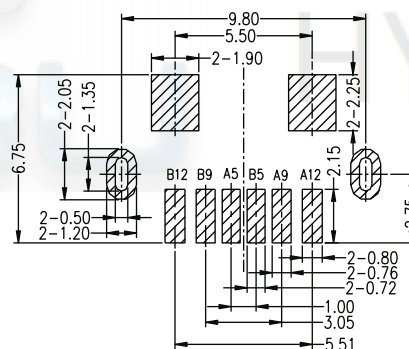

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



PIN ASSIGNMENTS

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X° ±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5260-06PN6.6LF
TITLE:	防水6P 立式两脚插板SMT 6.6L IPX8








广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

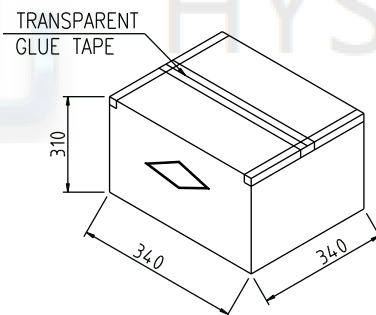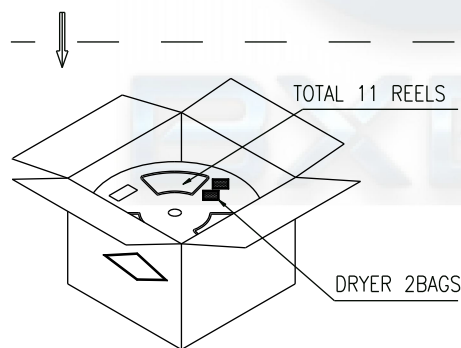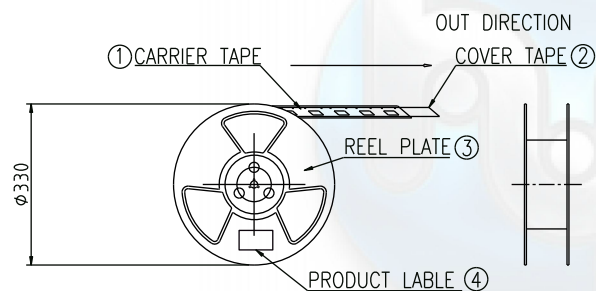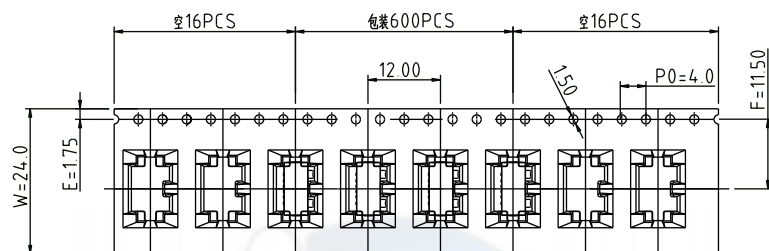

说明:

1. 每卷前后各空16PCS, 尾部用美纹胶纸封住;
2. 将产品放满盘后, 再卷一圈保护带, 用美纹胶纸将其封住, 并贴上1Pcs物料标签;
3. 每11卷盘一叠共6600Pcs并装入1个外箱内;
4. 在搬运过程中要轻拿轻放;
5. 在运输中不可堆放过多(1.8M最高), 不可重压;
6. 跌落测试条件:
成品箱从1.2米高度自由落体(一角三棱六面):
a. 产品不可跑出下带凹槽;
b. 产品不可有摔伤, 变形;
c. 内包装材料不可严重破损.

NO.	NAME	CONNECTOR (PCS)		Q'TY
		REEL	CARTON	
0	TYPE C RECEPTACLE	600	6600	6600PCS/CARTON
1	CARRIER TAPE	W=24mm,T=0.50mm		600PCS/PLATE
2	COVER TAPE	W=21.3mm		11PLATES/CARTON
3	REEL PLATE	φ330*100*24.4mm		11PCS/CARTON
4	PRODUCT LABER			11PCS/CARTON
5	CARTON	340*340*310mm		1PCS/PACKAGE

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm		U5260-06PN6.6LF
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		防水6P 立式两脚插板SMT 6.6L IPX8



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>