




ROHS
Compatible




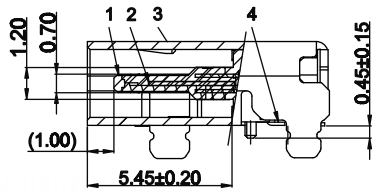

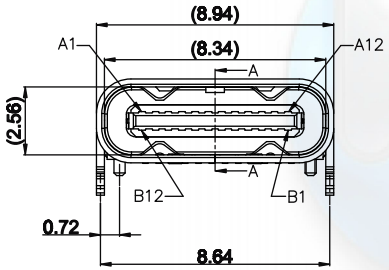

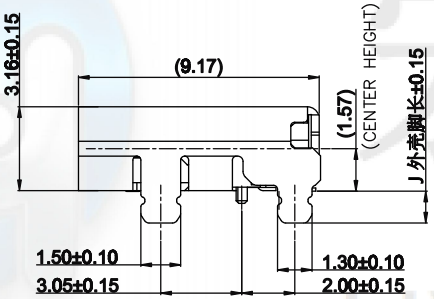

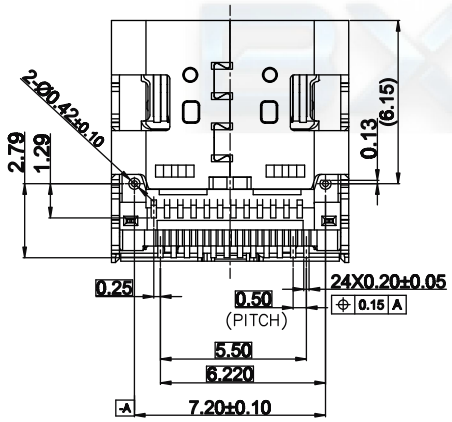



NOTE/注释：

1. SPECIFICATION/规格:
   - 1.1 Rated current（额定电流）: 5.0 A
   - 1.2 Voltage rating（额定电压）: 5V AC
   - 1.3 Contact Resistance（接触阻抗）: 40 m Ω Max.
   - 1.4 Insulation Resistance（绝缘阻抗）:100MΩ Min.
   - 1.5 Withstanding voltage（耐电压）: 100 VAC/minute
   - 1.6 Mating force（插入力）: 5~20N .
   - 1.7 Unmating force（拔出力）: 8~20N.
   - 1.8 Durability Cycle(寿命循环):10,000 cycle
   - 1.9 Operating temperature（工作温度）: -40°~+85°

U5	194-	24P	x	XX	9.17L	XX
↓	↓	↓	↓	↓	↓	↓
名称	流水号	PIN位	N;母座	J;脚长	L;长度	端子电镀规格
				0.6		01=镀金1u"
				0.9		03=镀金3u"
				1.2		05=镀金5u"
				1.6		15=镀金15u"
						30=镀金30u"

PIN ASSIGNMENT:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1−	Vbus	CC1	D+	D−	SBU1	Vbus	RX2−	RX2+	GND
GND	RX1+	RX1−	Vbus	SBU2	D−	D+	CC2	Vbus	TX2−	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10


TOLERANCE
X.X ±0.30 X.°±2°
.XX ±0.20 .X° ±1°
.XXX ±0.10 .XX°±0.5°

DRAWG NO.
U5194-24PNXXJ9.17LXX

TITLE:
24P板上四脚插板SMT 带弹 带柱 9.17L

广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 https://www.hystypec.com

ROHS
Compatible

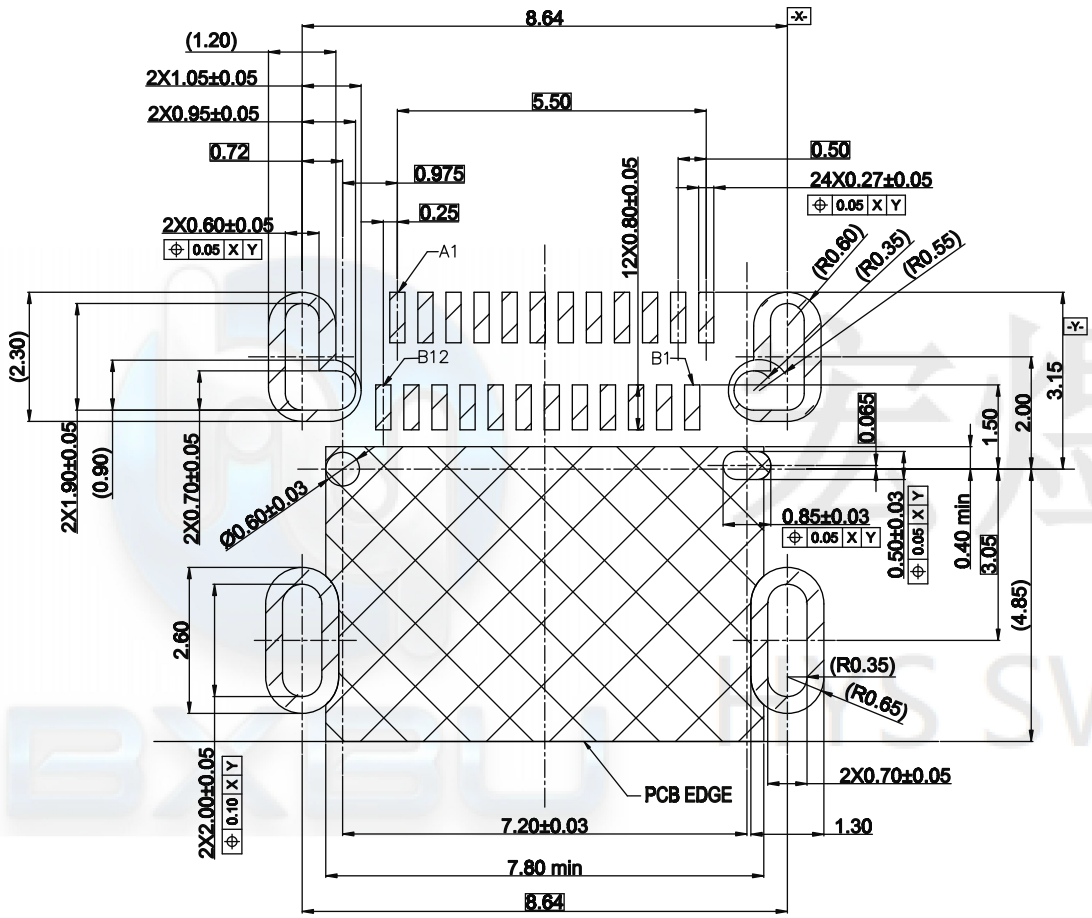

ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARK
4	TERMINAL	24	COPPER ALLOY XYK-40(C18140)	MATING SIDE:SEE PART NO; SOLDER TAIL:Gold FLASH, 50u" NICKEL OVERALL.	T=0.12
3	SHELL	1	SUS304	30U" MIN NICKEL PLATING	T=0.30
2	MID PLATE	1	SUS301-H	RINSE	T=0.15
1	MAIN HOUSING	1	HIGH TEMPERATURE	PA 9T BLACK UL94V -0	BLACK UL94V-0

BILL OF MATERIAL

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE


X.X ±0.30	X.°±2°
.XX ±0.20	.X° ±1°
.XXX ±0.10	.XX°±0.5°


DRAWG NO.
U5194-24PNXXJ9.17LXX


TITLE:
24P板上四脚插板SMT 带弹 带柱 9.17L


广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 https://www.hystypec.com

ROHS
Compatible

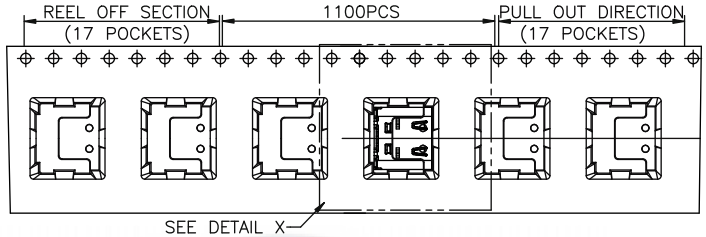

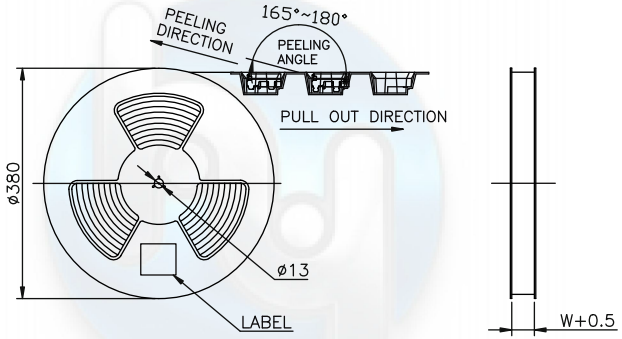

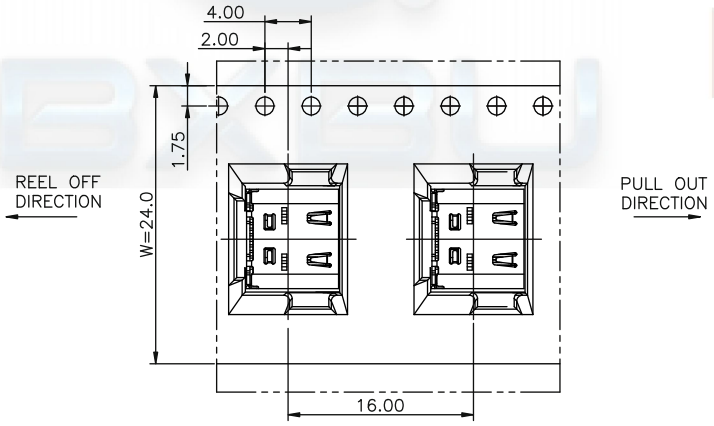

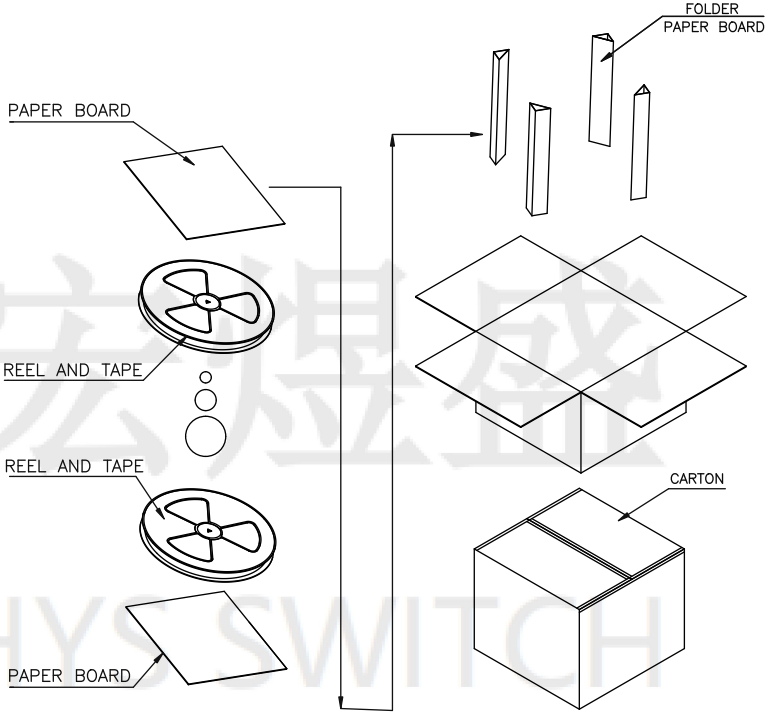

	REEL	CARTON
CONNECTOR (PCS)	1100	11000

DESIGN	Li Jinwei	SCALL		TOLERANCE	DRAWG NO. U5194-24PNXXJ9.17LXX
DRAWING	Wu Qifa	UNIT	mm	X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°	TITLE: 24P板上四脚插板SMT 带弹 带柱 9.17L
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		

广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 https://www.hystypec.com