
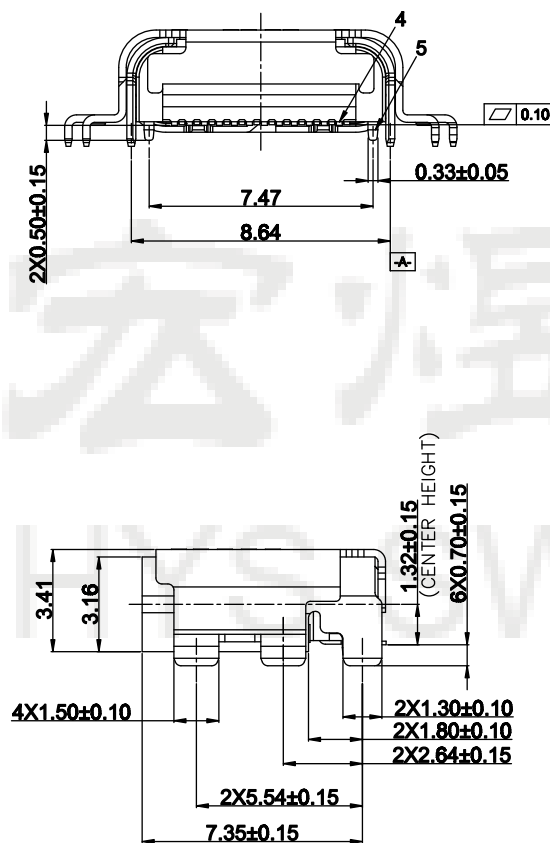


ROHS
Compatible

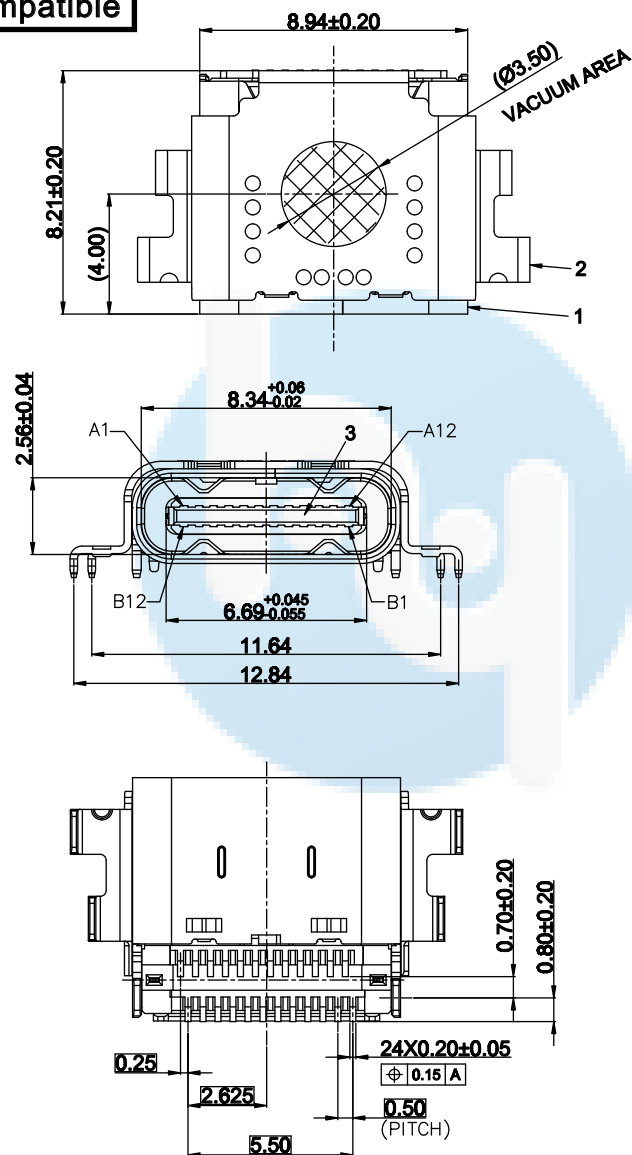

NOTE/注释:

1. SPECIFICATION/规格:

- 1.1 Rated current (额定电流): 5.0 A
- 1.2 Voltage rating (额定电压): 5V AC
- 1.3 Contact Resistance (接触阻抗): 40 m Ω Max.
- 1.4 Insulation Resistance (绝缘阻抗): 100MΩ Min.
- 1.5 Withstanding voltage (耐电压): 100 VAC/minute
- 1.6 Mating force (插入力): 5~20N.
- 1.7 Unmating force (拔出力): 8~20N.
- 1.8 Durability Cycle(寿命循环): 10,000 cycle
- 1.9 Operating temperature (工作温度): -40°~+85°

U5	149-	24P	x	0.23C	8.21L	XX
名称	流水号	PIN位	N;母座	C;沉板	L;长度	端子电镀规格
						01=镀金1u"
						03=镀金3u"
						05=镀金5u"
						15=镀金15u"
						30=镀金30u"


PIN ASSIGNMENT

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

DESIGN	Li Jinwei	SCALL			DRAWG NO.		东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com	
DRAWING	Wu Qifa	UNIT	mm		TOLERANCE			U5149-24PN0.23C8.21LXX
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°			TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		24P沉板0.23mm 六脚插板有后盖双壳SMT 8.21L			

ROHS





Compatible

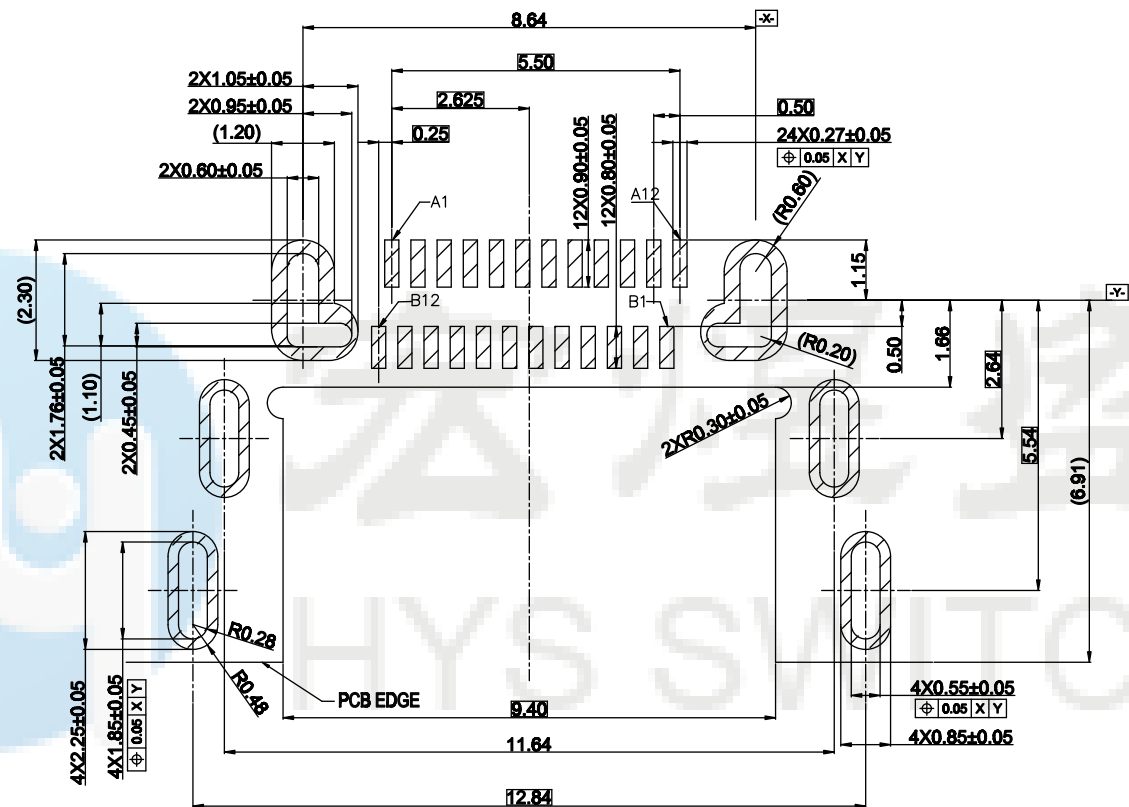

5	MID PLATE	1	SUS301	NICKEL PLATING	T=0.16
4	TERMINAL	24	C18140	MATING SIDE: Au 30u"MIN; SOLDER TAIL: Gold FLASH, 50u" NICKEL OVERALL.	T=0.12
3	MAIN HOUSING		PA9T HF 30%玻纤, UL94 V-0, 黑色		BLACK UL94V
2	OUT SHELL	1	SUS304	NICKEL PLATING	T=0.25
1	MAIN SHELL	1	SUS304	NICKEL PLATING	T=0.30
ITEM	DESCRIPTION	QTY	MATERIAL	FINISH	REMARK
BILL OF MATERIAL					

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX° ±0.5°	DRAWG NO. U5149-24PN0.23C8.21LXX TITLE: 24P沉板0.23mm 六脚插板有后盖双壳SMT 8.21L	 东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm			
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297			
APPROVAL	Liu Xiaohong	DATE	2020-06-10			

ROHS
Compatible

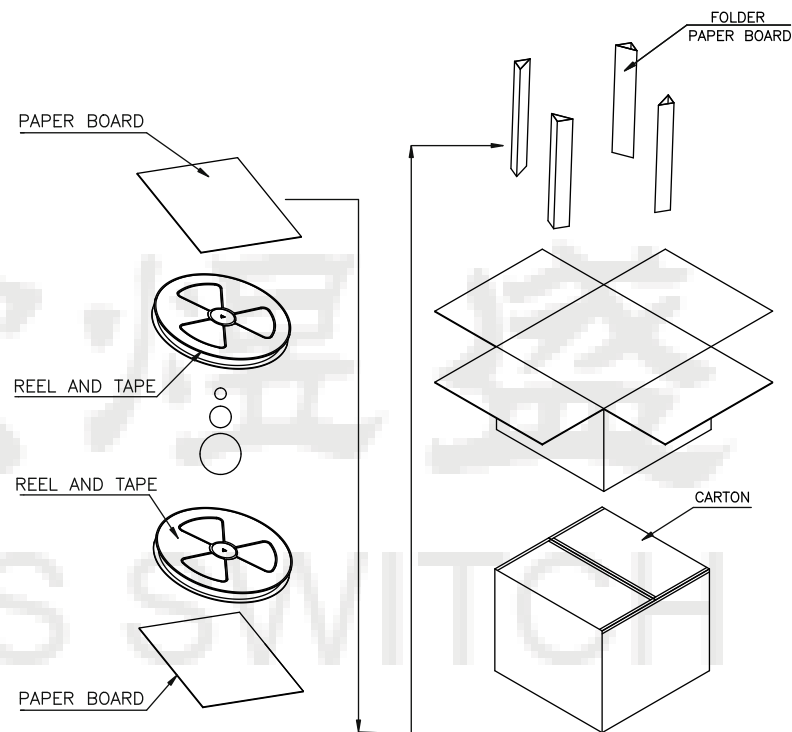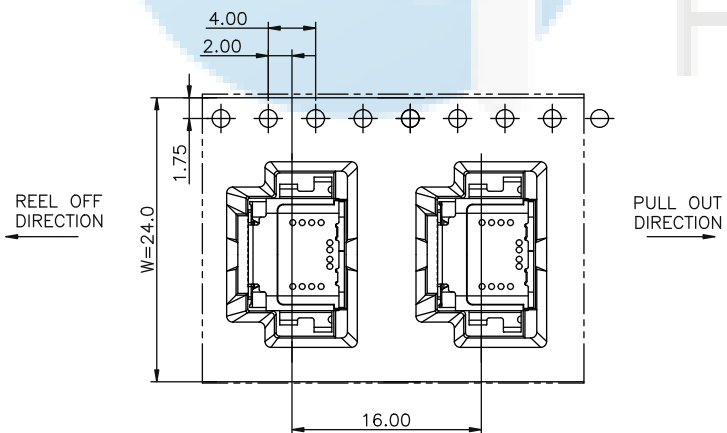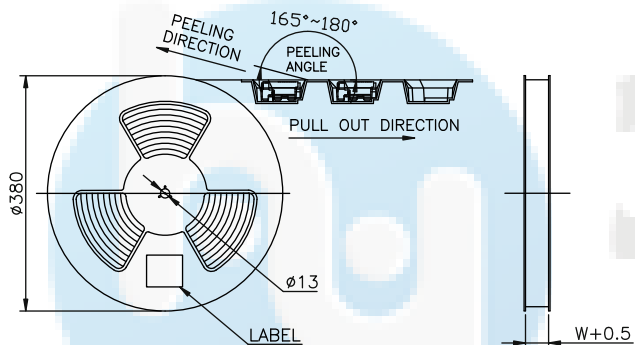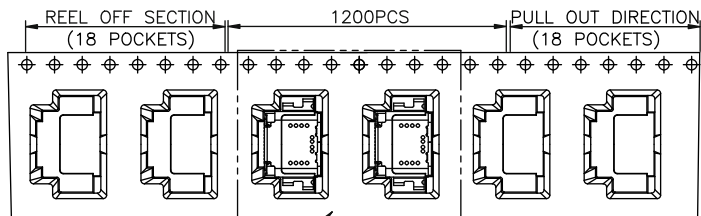

	REEL	CARTON
CONNECTOR (PCS)	1200	12000

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	 东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com	
DRAWING	Wu Qifa	UNIT	mm		U5149-24PN0.23C8.21LXX		TITLE:
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		24P沉板0.23mm 六脚插板有后盖双壳SMT 8.21L		
APPROVAL	Liu Xiaohong	DATE	2020-06-10				