


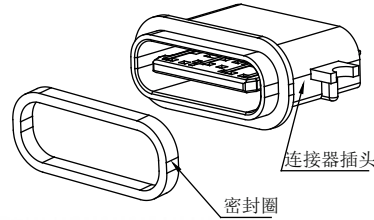
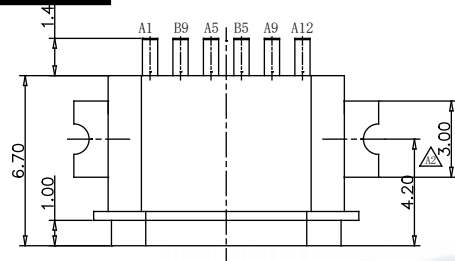


ROHS
Compatible

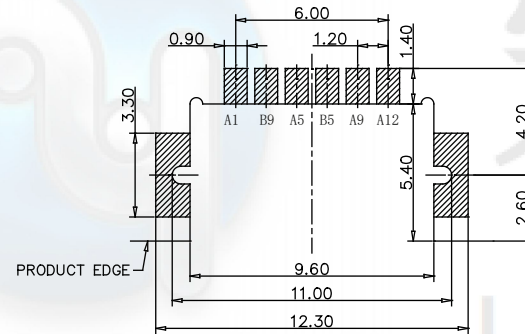



备注 (NOTE):

1. 电气特性:
 - 1.1. 接触区: 接触电阻 $40m\Omega$ Max, 允许 $10m\Omega$ 变化量. 测试条件: 20mv, 100mA下测量.
 - 1.2. 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.
 - 1.3. 额定电压: 5V.
 - 1.4. 耐电压: 100VAC.
 - 1.5. 绝缘电阻: 至少100兆欧.
2. 机械性能:
 - 2.1. 插入力: 0.5-2.0Kg
 - 2.2. 拔出力: 0.6-2.04Kg
 - 2.3. 插拔次数: 10000次.
 - 2.4. 可焊性: 温度 $210-230^{\circ}C$, 时间10秒.
 - 2.5. 工作环境: $-20^{\circ}C$ to $+85^{\circ}C$.

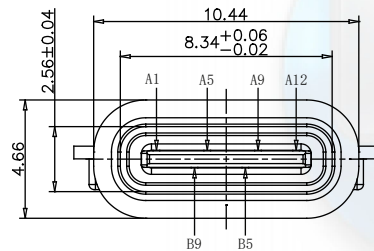


RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

U5 267- 06P x 1.6C 6.7L x
名称 流水号 PIN位 N;母座 C;沉板 L;长度 F;防水

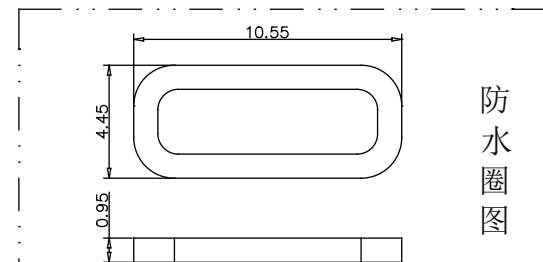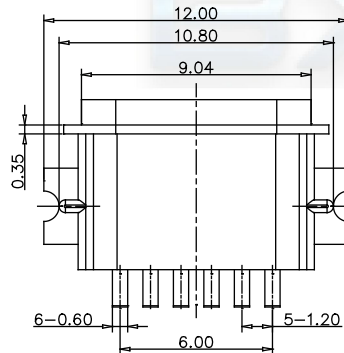

防水圈图

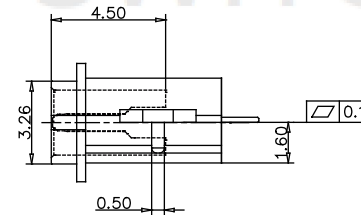

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	ZINC ALLOY, NI30u"Min PLATED
2	CONTACT	6	C2680, TIN80u"/Au1u"/Ni30u" PLATED
3	1MD HOUSING	1	LCP UL94 V-0 BLACK
4	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ± 0.30	X." $\pm 2^{\circ}$
.XX ± 0.20	.X" $\pm 1^{\circ}$
.XXX ± 0.10	.XX" $\pm 0.5^{\circ}$

DRAWG NO.

U5267-06PN1.6C6.7LF

TITLE:

防水6P 两脚贴片SMT 沉板1.6mm 6.7L IP68 (外壳锌合金)




广东宏煜盛电子科技有限公司



Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL: 0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

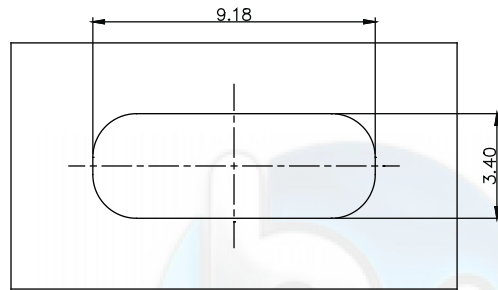

密封开孔参考尺寸(只供参考)
组装外壳时需要打环保润滑油

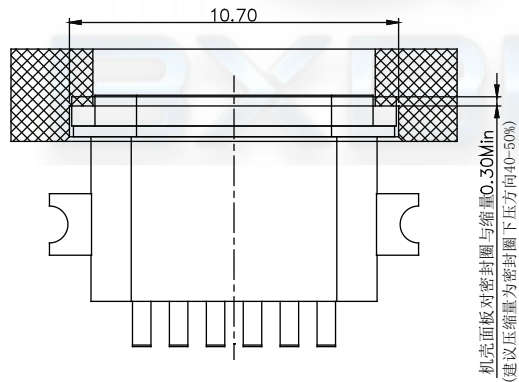


DESIGN	Li Jinwei	SCALL			DRAWG NO.	U5267-06PN1.6C6.7LF
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30	X.° ±2°	TITLE: 防水6P 两脚贴片SMT 沉板1.6mm 6.7L IP68 (外壳锌合金)
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20	.X° ±1°	
				.XXX ±0.10	.XX° ±0.5°	







广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

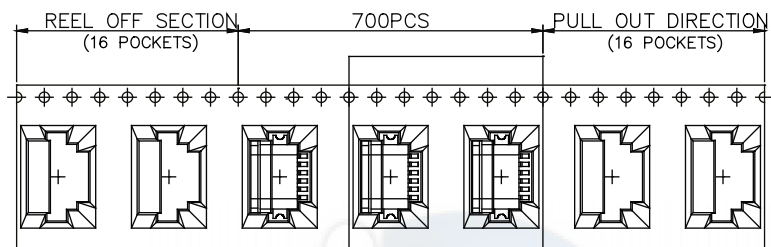

SEE DETAIL X

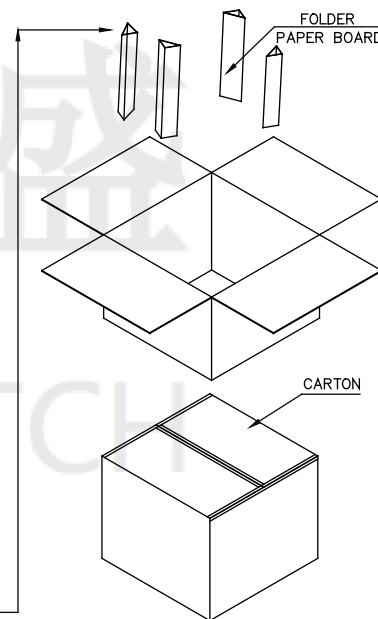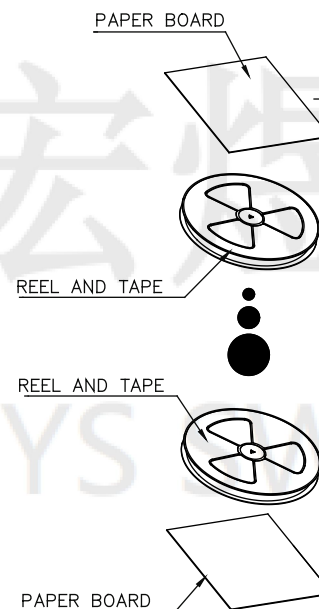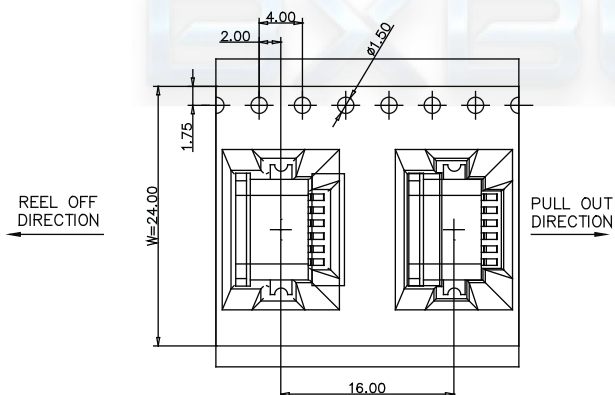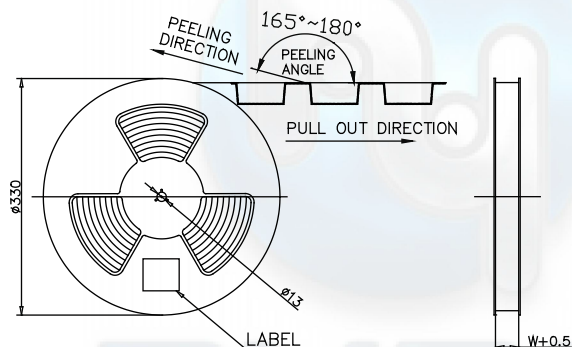

	REEL	CARTON
CONNECTOR (PCS)	700	7000

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5267-06PN1.6C6.7LF
TITLE:	防水6P 两脚贴片SMT 沉板1.6mm 6.7L IP68 (外壳锌合金)



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>